



Scan QR code
for the latest manual
www.surron.com

Manufacturer: CHONGQING QIULONG TECHNOLOGY CO., LTD

Address: No.30 Xinkang Road, Dadukou District,
Chongqing City, China

Post Code: 400082

Tel: +86-023-68905603

Version: YQ5A-EN-V1.5


Issue Date: 2026.2.28

This manual will provide you a better understanding of your Ultra Bee electric motorcycle. Please take your time to read this manual and all safety labels carefully before riding.

This manual contains the most current product information available at the time of printing. Your motorcycle may look and setup differ from the information supplied in this owner's manual. Please visit our website www.surron.com for updates and additional information about your motorcycle.

Surron®

Ultra Bee Series Electric Motorcycles Owner's Manual

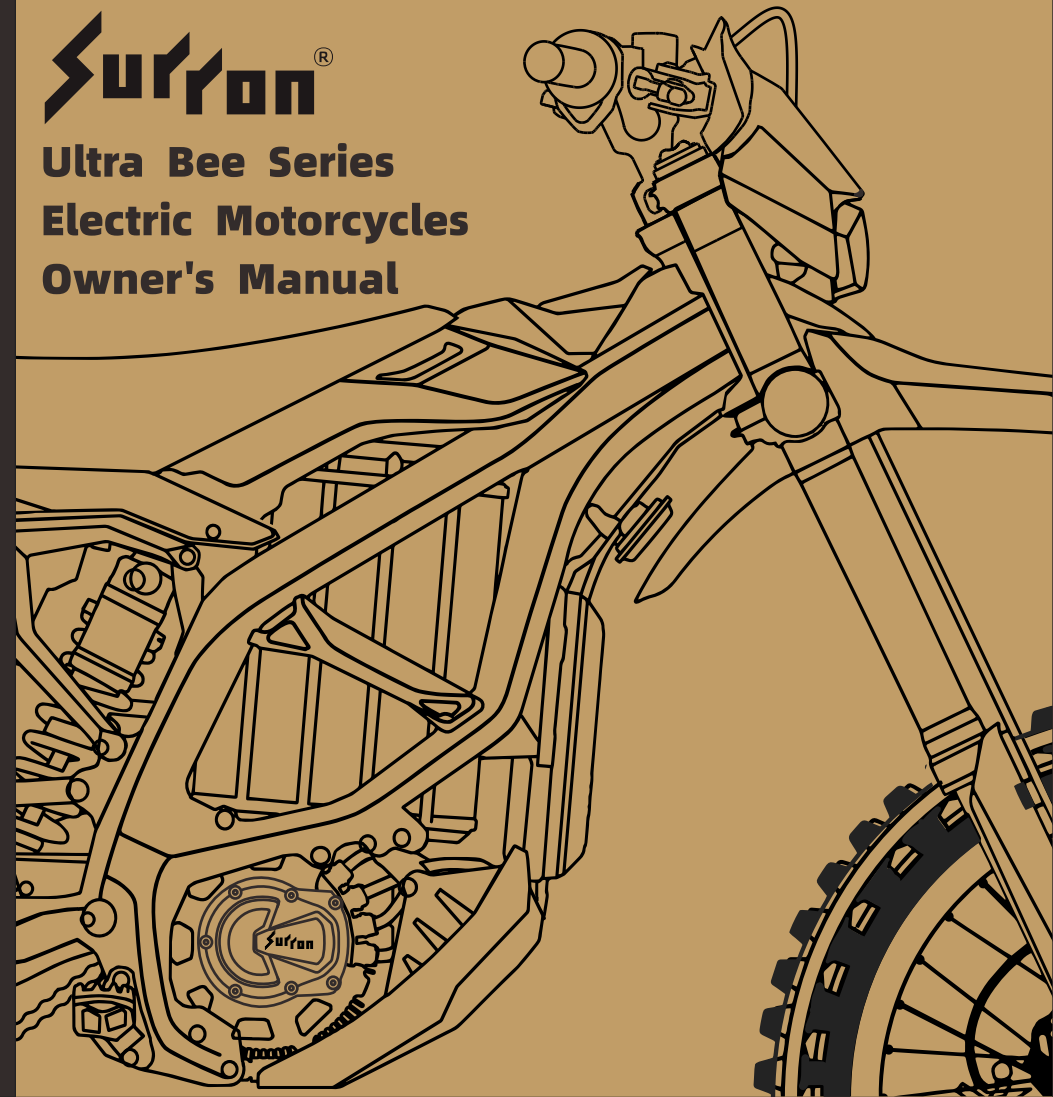

This manual covers the following electric motorcycles:



ULTRA BEE R-25 (Road)

\
Headlight, Turn Signals
and Rear Brake Light
AT Tires

ULTRA BEE T-25 (Trail)

\
Headlight, Turn Signals
and Rear Brake Light
Offroad Tires

ULTRA BEE T NA-25

\
Headlight
\
Offroad Tires

Riding Tips For Maximum Range

Range varies in Ultra Bee electric motorcycles similarly to how it varies in gas motorcycles. The range variety of Ultra Bee electric motorcycles comes from the riding application after each full charge. In addition to riding habits, energy consumption is also affected by environmental conditions (such as extreme cold or hot weather, riding on steep hill or soft sand etc.). To achieve the maximum range with a single full charge, please pay attention to reduce the maximum speed, lessen sudden acceleration and maintain a constant speed to ensure the maximum range.

To reach the maximum range, please follow the tips below:

1. Avoid frequent and acute acceleration and braking.
2. Under safe conditions, riding range can be extended using REGEN function.
3. Maintain a correct tire pressure (Please refer to Recommended tire pressure table at page 10.9).
4. Remove unnecessary goods and reduce load.
5. The maximum range in winter or summer could be slightly different.

In conclusion, you can estimate the bike range according to the above factors and your riding habits.

Note: The range will vary significantly according to the various tough road conditions during off-road riding.

Introduction.....1.1

Important Notice.....1.1

Transporting.....1.2

Safety Information.....2.1

Safety Riding Requirement.....2.1

Important Information.....2.3

Location of Important Labels.....2.5

Feature Introduction.....3.1

Display and Indicator.....4.1

Dashboard Overview.....4.1

Feature Setting.....5.1

Dashboard Setting.....5.1

System Feature Mode Display.....5.4

Feature Introduction.....6.1

Handlebar controls.....6.1

Riding Mode Switch.....6.4

SURRON Wheelie Control (SWC) System.....6.5

Auto-Hold Function 6.10

Parking Brake Reminder 6.11

Parking Brake Operation..... 6.12

Battery Pack Removal..... 6.13

Battery Pack Installation..... 6.14

Charger Storage.....6.15

Instrument Clock Battery.....6.16

T-BOX Binding6.16

Starting and Operating.....7.1

Check Before Riding.....7.1

Key Switch.....7.1

Steering Lock.....7.2

Seat Lock.....7.3

Starting and Operating.....7.3

Temperature Indicator.....7.4

Front Fork Adjustment.....7.5

Rear Shock Adjustment.....7.6

Power Management.....8.1

Battery Pack.....8.1

Power Supply and Charging.....8.3

Power System Management.....9.1

Power System.....9.1

Maintenance.....10.1

Maintenance Item.....10.1

Maintenance Records.....10.1

Scheduled Maintenance.....10.1

Maintenance Schedule.....10.1

Torque Management.....10.3

Battery Pack.....10.5

Brake System.....10.5

Brake Fluid Check.....10.5

Suspension System.....10.8

Wheels and Tires10.8

Chain.....10.9

Headlight Adjustment10.10

Light Replacement.....10.11

Motorcycle Cleaning.....10.12

Long-term Storage.....10.13

Ultra Bee Electric Motorcycle Parts.....10.14

Fuse.....10.14

Motorcycle Electrical Circuit Diagram.....10.15

Troubleshooting.....11.1

Ultra Bee Electric Motorcycle Troubleshooting.....11.1

Safety Interlock.....11.1

Precautions for Ultra Bee Electric Motorcycle.....11.1

System Warning Message.....11.2

Troubleshooting.....11.7

Warranty Information.....12.1

Condition of Warranty.....12.1

Period of Warranty for Surron Motorcycle.....12.1

Parts Covered by the Warranty.....12.2

Warranty Labor Coverage.....12.2

General Exclusion from Warranty.....12.2

Owner Responsibility12.3

Limitations on Warranty.....12.4

Disclaimer12.4

How to Obtain Warranty Service12.6

Reporting Safety Defects12.6

Annex.....13.1

Maintenance Record Sheet.....13.1

After-sales Service Record Sheet.....13.7

Parameters List.....13.9

Introduction

Introduction

Important Notice

Congratulations on your decision to purchase a Surron electric motorcycle.

We welcome you to the community of Surron motorcycle riders. You are now the owner of a state-of-the-art electric motorcycle which, with appropriate care, will bring you pleasure for a long time to come.

This electric motorcycle has been designed and built mainly to withstand the normal stresses and strains of offroad use, and only authorized for operation on public roads in its homologated version. This motorcycle must only be used as intended, dangers can be arisen for people, property and the environment through use not as intended.

This manual is designed to provide you with a better understanding of the operation, inspection, basic maintenance requirements, main functions, helpful tips and explain important safety matters of this electric motorcycle. Please read through this Owner’s manual carefully, exercise cautiously when riding the motorcycle, and contact Surron or the authorized Surron dealer if you have any questions. For the latest manual updates and additional information about your motorcycle, please visit the official Surron website:

/// www.surron.com ///

This manual is intended for personal use only, this manual is not intended for commercial use. To protect your investment, we urge you to take responsibility for keeping your Ultra Bee well maintained. Scheduled service is a must, of course. But it’s just as important to observe the break-in guidelines, and preform all the pre-ride and other periodic checks detailed in this manual. This Owner’s Manual should be considered a permanent part of this motorcycle and should remain with it even if the motorcycle is subsequently sold. Please make sure the next owner well received the manual, it is, by regulation and law in same countries, regions or states, an important part of the vehicle.

All specifications contained herein are non-binding. This manual contains the word WARNING! to indicate something that could hurt you or others. The terms “right” or “left” in this manual refer to the rider’s right or left side when sitting on the motorcycle.

If you have any questions concerning the operation or maintenance of your motorcycle, or if you ever need a special service or repairs, please contact your authorized Surron Motorcycles dealer, and remember that your dealer knows your Ultra Bee best and is dedicated to your complete satisfaction. If the dealer’s service cannot meet your requirement, you can also contact Surron’s After-sale Service Department for help at any time:

/// service@qiulongtech.com ///

Happy riding! We wish you enjoy safe and excellent riding at all times.

Warning

If the controller, battery pack or motor malfunctioned, please contact the Surron authorized dealer immediately for diagnosis, replacement or maintenance.

Warning

This product can expose you to chemicals, including lead and BPA, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

Transporting

It is highly recommended that the electric motorcycle be firmly secured on the transport frame using ratchet straps while it is being transported. It is also recommended to use soft straps to reduce scratches or other damages. It is recommended to fix the ratchet straps according to the points shown in the figure. The front two are tied to the handlebar and the back two are tied to the left and right swing arm. Please do not damage the chain or brake line when tied the straps. The tie down straps should be at a 45° angle from the motorcycle. Please follow the manufacturer’s instructions for the ratchet straps you are using.

If you use a truck or motorcycle trailer to transport your Ultra Bee, we recommend that you follow the guidelines below:

1. Use a loading ramp.
2. Secure the motorcycle in an upright position, using motorcycle tie-down straps.
3. Avoid using rope, which can loosen and allow the motorcycle to fall over.

To secure your Ultra Bee, brace the front wheel against the front of the truck bed or trailer rail.

Attach the lower ends of two straps to the tie-down hooks on truck bed or trailer rail. Attach the upper ends of the straps to the handlebar (one on the right side, the other on the left), close to the fork.


Check that the tie-down straps do not contact any control cables or electrical wiring.

Tighten both straps until the front suspension is compressed about half-way. Too much pressure is unnecessary and could damage the fork seals.

Introduction

Use another tie-down strap to keep the rear of the motorcycle from moving.
We recommend that you do not transport your Ultra Bee on its side. This can damage the motorcycle.

1.3

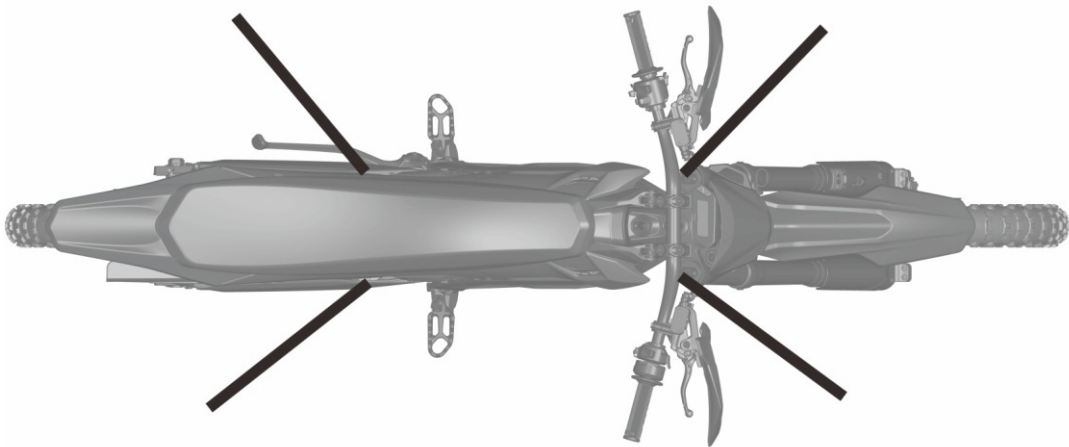

Safety Information

Safety Riding Requirement

Your electric motorcycle can provide many years of service and pleasure if you take responsibility for your own safety and understand the challenges you can meet while riding. There is a lot you can do to protect yourself whilst riding. Be aware that offroad racing is a physically demanding sport that requires more than just a fine motorcycle. To do well, you must be in excellent physical condition and be a skillful rider. For the best results, work diligently on your physical conditioning and practice frequently.

This electric motorcycle has been designed and built mainly to withstand the normal stresses and strains of offroad use. This electric motorcycle is only authorized for operation on public roads in its homologated version. This motorcycle must only be used as intended, otherwise dangers can be arisen for people, property and the environment through use not as intended.

You will find many helpful recommendations and safety instructions throughout this manual. The followings are a few that we consider to be the utmost important.

Ultra Bee is a high-performance electric motorcycle and should be treated with extreme caution.

Proper safety gear, including a regional/national approved helmet, riding boots, eyewear, gloves, and protective clothing should be worn while riding to reduce the risk of potential injury, whether you are practicing to improve your skills, or riding in

competition. We highly recommend the use of full height motocross boots since the vast majority of motorcycle injuries are through ankle, leg and foot impact.

Read all Warning! and instructions in this manual as well as all the safety labels on the bike before operating your electric motorcycle.

Never allow a guest to ride your electric motorcycle without proper instruction.

Ensure you have the legal qualification to ride the motorcycle before operation.

Never consume alcohol or drugs before operation of your electric motorcycle. Even one drink or drug can reduce your ability to respond to changing conditions, and your reaction time get worse with every additional drink or drug. So don't consume alcohol or drugs and ride, and don't let your friends or others drink and ride either.

Please be responsible when operating Ultra Bee electric motorcycle. Please do not ride dangerously and recklessly. Please do not ride in a way that against the local law and regulations and affects the safety of the public and yourself.

Take time to get to know your Ultra Bee. Because every motorcycle is unique, take time to become thoroughly familiar with how this one operates and responds to your commands before placing your machine, and yourself, in competition.

2.1

Safety Information

Learn and respect your limits. Never ride beyond your personal abilities or faster than conditions warrant. Remember that alcohol, drugs, illness and fatigue can reduce your ability to perform well and ride safely.

Keep your Ultra Bee in safe condition. Use only Surron approved parts and Surron Motorcycles genuine accessories. Maintaining your Ultra Bee properly is critical to your safety. A loose bolt, for example, can cause a breakdown in which you can be seriously injured. Only operate the vehicle when it is in perfect technical condition, in accordance with its intended use, and in a safe and environmentally compatible manner.

2.2

This motorcycle is a high voltage electric motorcycle, follow the safety and caution instructions that apply when using an electric motor. If you smell an unusual odor coming from the lithium-ion (Li-Ion) battery, park your Ultra Bee in a safe place outside and away from flammable objects, and then turn off the key switch. Contact your local authorized Surron dealer to help you to inspect your Ultra Bee immediately.

Prior to each use, the rider must check everything listed in the “Check before Riding” section on page 7.1, and the charge level of the battery pack as indicated on the dashboard display.

It is important to keep your motorcycle properly maintained and in safe riding condition. Having a breakdown can be difficult, especially if you are stranded offroad far from your base. To help avoid problems, inspect your motorcycle before every ride and



perform all recommended maintenance according to the maintenance schedule and adjustment requirements listed in this manual. Be sure you understand the importance of checking all items thoroughly before riding. If your Ultra Bee is off-road version, please understand your motorcycle is designed and manufactured for off-road use only. The tires are not made for paved surface use and the motorcycle does not have turn signals or other features required for use on public roads. If you need to cross a paved or public road, use other authorized vehicle to transporting or get off the motorcycle and push your motorcycle to your destination.

The rear brake lever is located on the left side of the handlebar. Because this electric motorcycle does not have a manual transmission, and thus there is no clutch and gear shifting.

Modifying an Ultra Bee electric motorcycle could cause the motorcycle to be unsafe to ride and may cause serious injury. Surron is not responsible for any unauthorized modifications.

Do not load heavy or large objects or add-on accessories on the Ultra Bee electric motorcycle. Large, bulky items can adversely affect the safety and performance of an Ultra Bee electric motorcycle.

Important Information

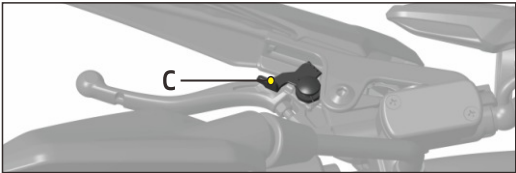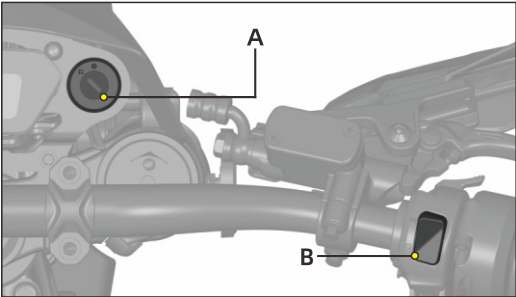

Several important operational considerations are listed below:

Always turn the key switch A and motor stop switch B to the OFF position when not actively riding. It is extremely easy to forget that the motorcycle is still in standby mode because it is completely silent. An accident might occur if the motorcycle is left powered on while getting on or off the motorcycle.

Turn the motor stop switch B OFF and make sure the READY indicator is not light up when pushing or moving

Safety Information

the motorcycle.

Use the parking brake C when you are stopped on a ramp or steep hill. Do not hold partial throttle to keep the motorcycle stationary on a ramp or steep hill, as it can trigger the locked rotor protection which cause the motorcycle to slip back.

A rechargeable Lithium-ion battery is installed in the motorcycle. The battery pack is located under the seat, please recharge the battery pack of your electric motorcycle after each use. Once fully charged, please disconnect from AC power supply. Make sure that the charging is carried out in a safe and open space or under monitor.

When unplugged the battery power plug while the key in the OFF position, the motorcycles electronic components will consume a small amount of power and the battery pack will drain extremely slowly. If you don't ride for a long-term period of time (30 days or more), you may need to charge the electric motorcycle for a few hours prior to your next ride.

The battery pack will be damaged if it is stored for a long time under low power.

2.3

Safety Information

2.4

Caution

Only charge the Ultra Bee lithium-ion battery pack with the manufacturer's genuine charger or Surron approved charger. Only use the battery pack while it is inside the vehicle.

The battery pack does not require nor benefit from deep discharging. To get the maximum battery pack lifecycle, recharge the battery pack after each ride. Constantly leaving the battery pack in a deep discharging state will damage the battery cell.

Failure to follow instructions of the battery pack storage and charging as written in this manual may void the warranty of your Ultra Bee electric motorcycle. These guidelines have been rigorously tested to ensure maximum battery pack efficiency and service.

Note

The battery pack contains components and elements that might harmful to the environment, so please dispose the battery pack properly and in compliance with the applicable regulations. Never throw the battery into the household trash bin.


Safety Information

2.5


Location of Important Labels




MCU recommended torque label A, MCU info label B

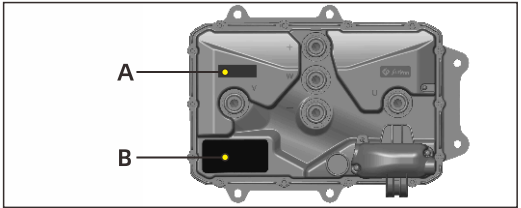

Frame Nameplate A, VIN label B

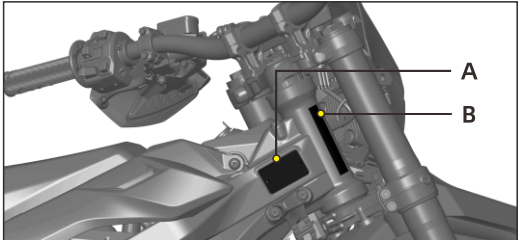

Motor Serial Number A

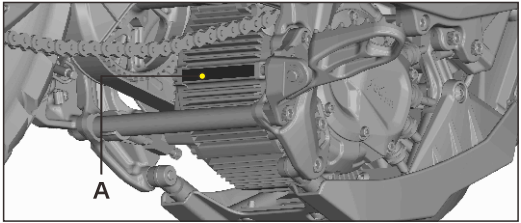


2.6

T-BOX(Telematics BOX)
S/N Label



T-BOX(Telematics BOX)
SIM Label



Vehicle VIN Label



If your vehicle has T-BOX installed, please visit the Download Center of Surron official website. Download the Surron App, install and connect the device to use.




Scan this QR code to enter the Download Center.

2.7



Feature Introduction

3.1

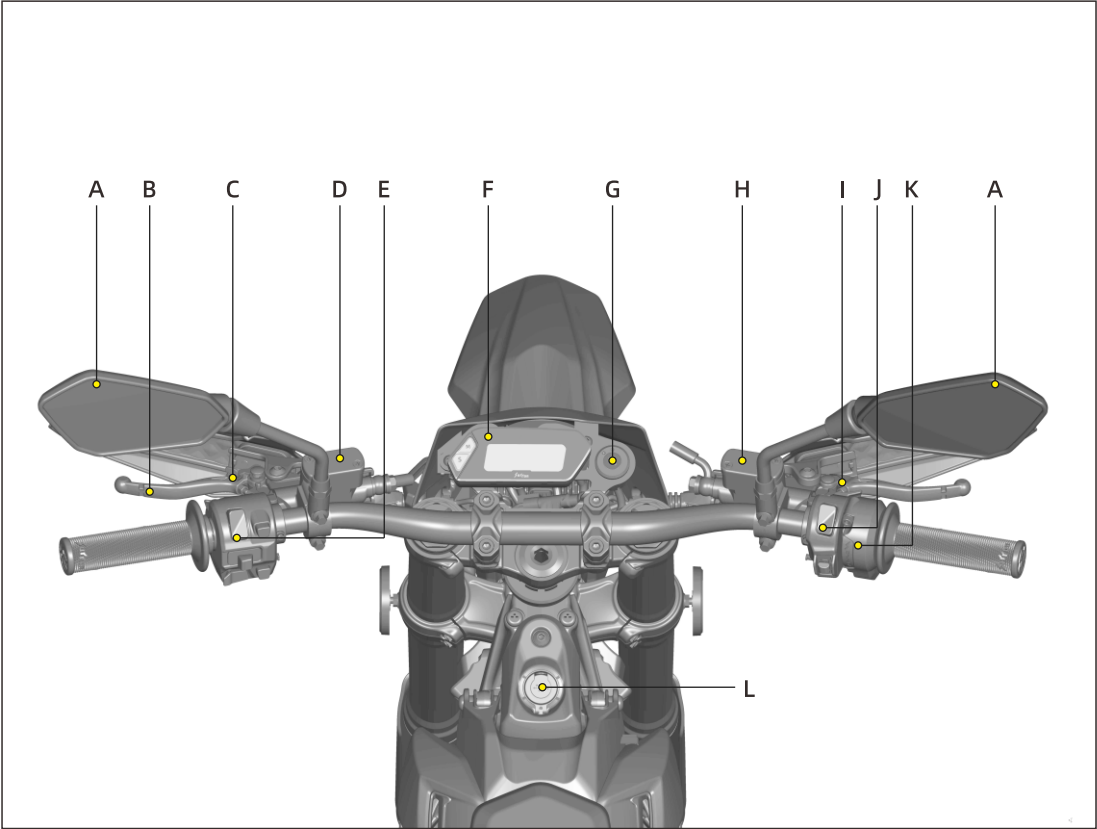

-FETCH LIGHT-飞起来-

Feature Introduction

3.2

A. Mirrors

The rearview mirrors of the Ultra Bee are convex mirrors. Convex mirrors have a curved surface that provides wider field of vision than flat mirrors. When observing the rearview mirrors, the objects reflected appear further away than they are, care must be used when judging the distance of objects seen in these mirrors.

B. Rear Brake Lever

For description and operation, please refer to “Feature Introduction” , on page 6.1.

C. Parking Brake Lever

For description and operation, please refer to “Feature Introduction” , on page 6.1

D. Rear Brake Fluid Reservoir

For description and operation, please refer to “Maintenance” , on page 10.5.

E. Left Combination Switch

For description and operation, please refer to “Feature Introduction” , on page 6.1.

F. Dashboard

For description and operation, please refer to “Display and Indicator” , on page 4.1. and “Feature Setting” , on page 5.1.

G. Key Switch

For description and operation, please refer to “Starting and Operating” , on page 7.1.

H. Front Brake Fluid Reservoir

For description and operation, please refer to “Maintenance” , on page 10.5.

I. Front Brake Lever

For description and operation, please refer to “Feature Introduction” , on page 6.3.

J. Right Combination Switch

For description and operation, please refer to “Feature Introduction” , on page 6.3.

K. Throttle Grip

For description and operation, please refer to “Feature Introduction” , on page 6.3.


L. USB Port

5V 2.4A USB A port

-FETCH LIGHT-飞起来-

Feature Introduction

3.3

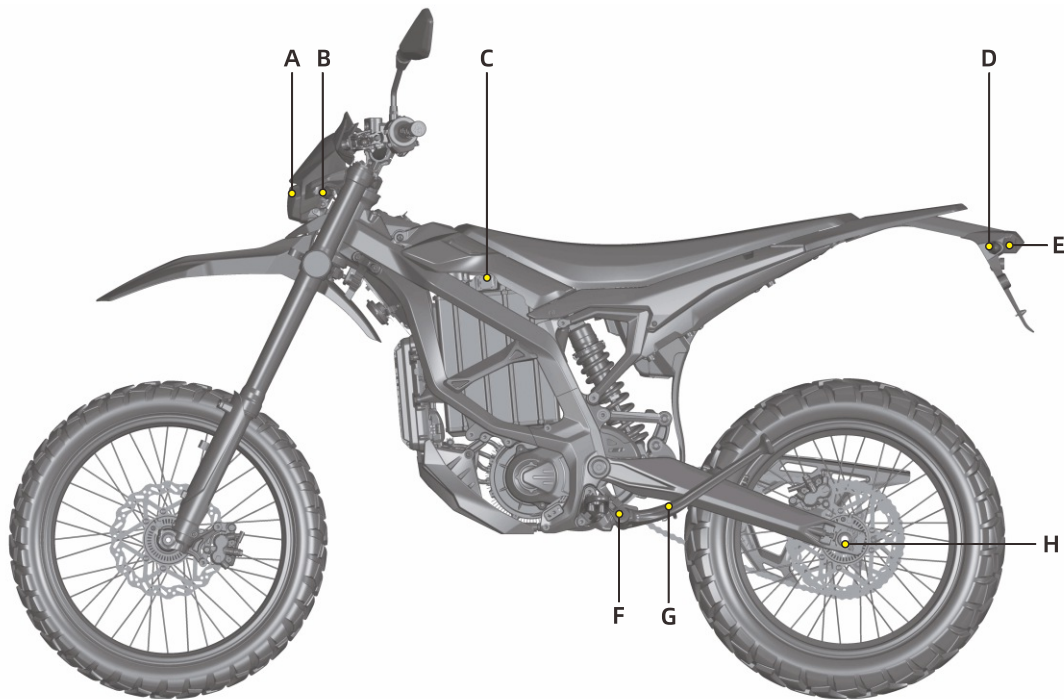

-FETCH LIGHT-飞起来-

A. Headlight

For headlight operation, please refer to "Feature Introduction" , on page 6.1.

For headlight replacement, please refer to "Maintenance" , on page 10.11.

For headlight alignment, please refer to "Maintenance" , on page 10.10.

B. Front Turn Signals

For turn signals operation, please refer to "Feature Introduction" , on page 6.1.

For turn signals replacement, please refer to "Maintenance" , on page 10.11.

C. Integrated Battery Charging Port

For description and operation, please refer to "Power Management" , on page 8.1.

D. Rear Turn Signals

For rear turn signals operation, please refer to "Feature Introduction" , on page 6.1.

For rear turn signals replacement, please refer to "Maintenance" , on page 10.11.

Feature Introduction

3.4

E. Brake/Tail/License Plate Light

For brake/tail/license plate light replacement, please refer to "Maintenance" , on page 10.11.

F. Side Stand Switch

This switch is a safety sensor that prevents accidentally incorrect motorcycle operation when the side stand is down.

G. Side Stand

The side stand supports the motorcycle when parked. The key switch should be in the OFF position when parked.

H. Chain Adjuster

Located on left and right side of the swingarm, for the tension adjustment procedure, please refer to "Maintenance" ,on page 10.9.


Caution

Park the motorcycle only on a flat firm surface, otherwise the motorcycle could fall over and causing damage.

-FETCH LIGHT-飞起来-

Feature Introduction

3.5

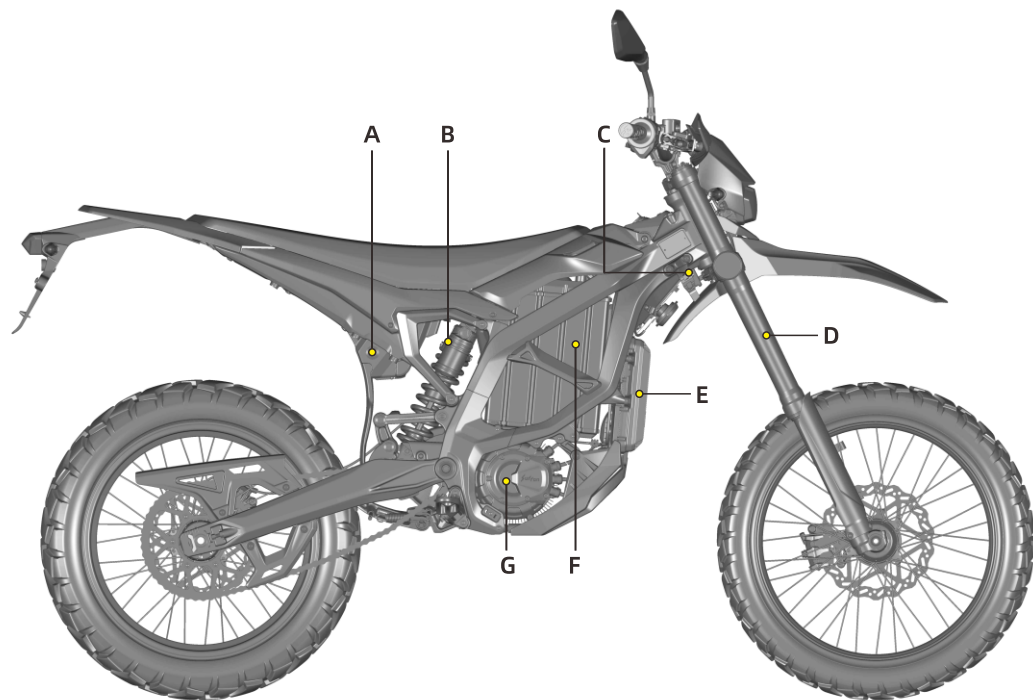

-FETCH LIGHT-飞起来-

Feature Introduction

3.6

A. Seat Lock

For description and operation, please refer to “Starting and Operating” , on page 7.3.

B. Rear Shock Absorber

For description and operation, please refer to “Starting and Operating” , on page 7.8.

C. Steering Lock

For description and operation, please refer to “Starting and Operating” , on page 7.2.

D. Front Fork

For description and operation, please refer to “Starting and Operating” , on page 7.7.

E. MCU

For description and operation, please refer to “Power System Management” , on page 9.1.

F. Battery Pack

For description and operation, please refer to “Power Management” , on page 8.1.


G. Motor

For description and operation, please refer to “Power System Management” , on page 9.1.

-FETCH LIGHT-飞起来-

Display and Indicator

Dashboard Overview

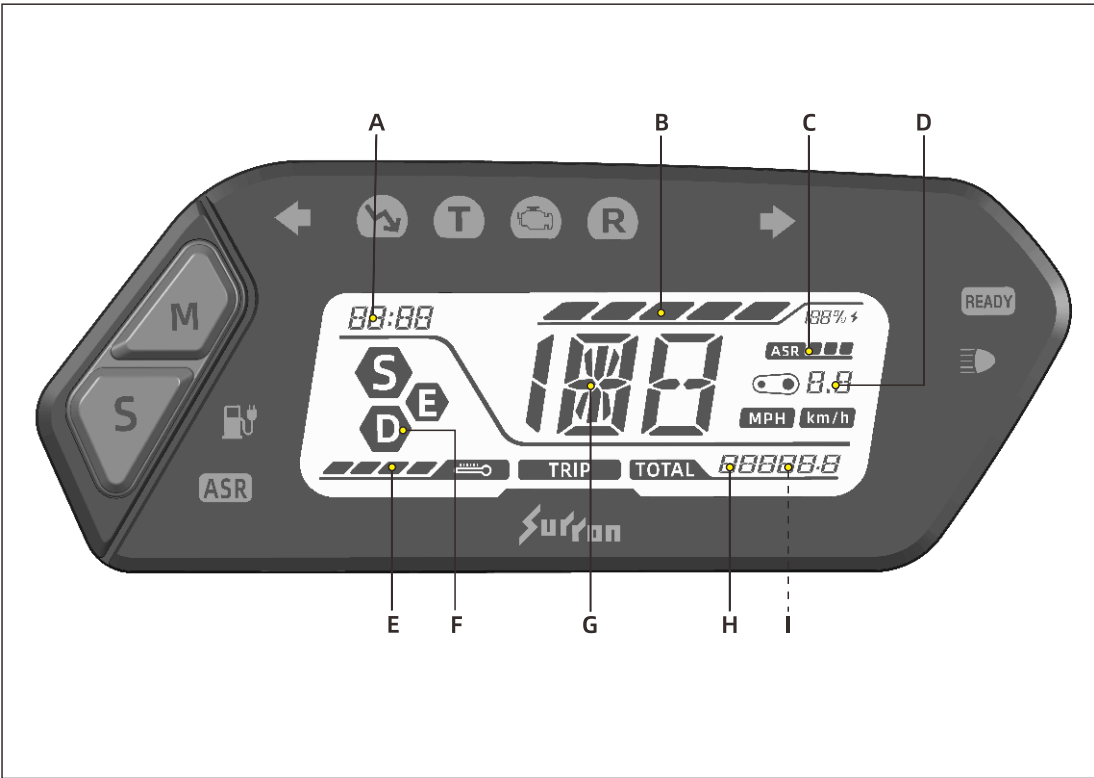

Display and Indicator

A. Clock

The clock displays time in 24-hour mode.

B. Charge Indicator

This indicator and readout display the amount of energy remaining in the battery pack, which is similar to the fuel gauge on a gasoline powered motorcycle.

C. ASR Indicator

This indicator displays the current ASR (Traction Control) level, and it disappears when ASR is turned OFF.

D. Transmission Ratio Display

It displays the current transmission ratio of Ultra Bee electric motorcycle.

E. Temperature Indicator

The temperature indicator is on the left side of the dashboard LCD display, indicating the overall temperature of the motor, MCU and battery pack. When the temperature of one of these components exceeds the maximum temperature limitation, the temperature indicator will start to flash. For description and operation, please refer to "Starting and Operating" , on page 7.4.

F. Riding Mode

This area displays the riding mode (S, E, D)

corresponding to the Riding mode of SPORT, ECO and DAILY. The Riding mode switch is located on the right handlebar.

For description and operation, please refer to "Feature Introduction" , on page 6.4.

G. Speedometer

The speedometer is digital display in either kilometers per hour (km/h) or miles per hour (mph).

For description and operation, please refer to "Feature Setting" , on page 5.1.

H. Odometer

The odometer displays the total distance the motorcycle has been ridden in kilometers or miles.

I. Warning Code Display

When the system fault has been detected, the corresponding Warning Code will be displayed on this area. For Warning Code explanation, please refer to "Troubleshooting" on page 11.4.

Display and Indicator

A. Left Turn Signals Indicator

Once the Left Turn Signals switch is toggled, the Left Turn signals remains flashing until the Turn signals request has been canceled.



B. Low Power Indicator

This indicator displays the condition of the power system, remain flashing when power system enter low power mode.



C.TURBO Mode Indicator

This indicator displays the working status of Turbo mode. If the indicator is off, Turbo mode is not available. If the indicator illuminates, Turbo mode is available and ready to be use. If the indicator flashes slowly, Turbo mode is in use. If the indicator flashes quickly, Turbo mode is about to end.



D. System Warning Indicator

The indicator illuminates when a fault has been detected. Please refer to "Troubleshooting" for detailed Warning Code, on page 11.4.



E. Reverse Mode Indicator (R)

The indicator illuminates when reverse mode is ready to use; the indicator flash when the reverse mode is in use; the indicator disappears when the reverse mode is OFF.



F. Right Turn Signals Indicator

Once the Right Turn Signals switch is toggled, the Right Turn signals remains flashing until the Turn signals request is canceled.



G. Low Energy/Charging Indicator

When the energy remaining in the battery pack is low (State of Charge (SOC) < 20%), the low energy indicator illuminates. If the energy remaining in the battery pack is very low (SOC <5%), the indicator flashes. The indicator also flashes when the motorcycle is being charged.



H. ASR (Traction Control System) Indicator

The ASR (Acceleration Slip Regulation) traction control feature is turned ON and OFF by the ASR button, and the ASR indicator illuminates



Display and Indicator

when activate and goes off if ASR has been turned OFF. When the ASR indicator flashes means the speed sensor or the ASR feature is malfunctioned. Please check whether the gap between the wheel speed sensor and the speed sensor ring is in the range of 0.8 ~ 1.2mm, and whether the wheel speed sensor is damaged.


I. Ready Indicator

The indicator illuminates mean the motorcycle is ready to go.Twist the throttle when the indicator illuminates, the motorcycle will move.



J. High Beam Indicator

When the headlight high beam is ON, this indicator illuminates.

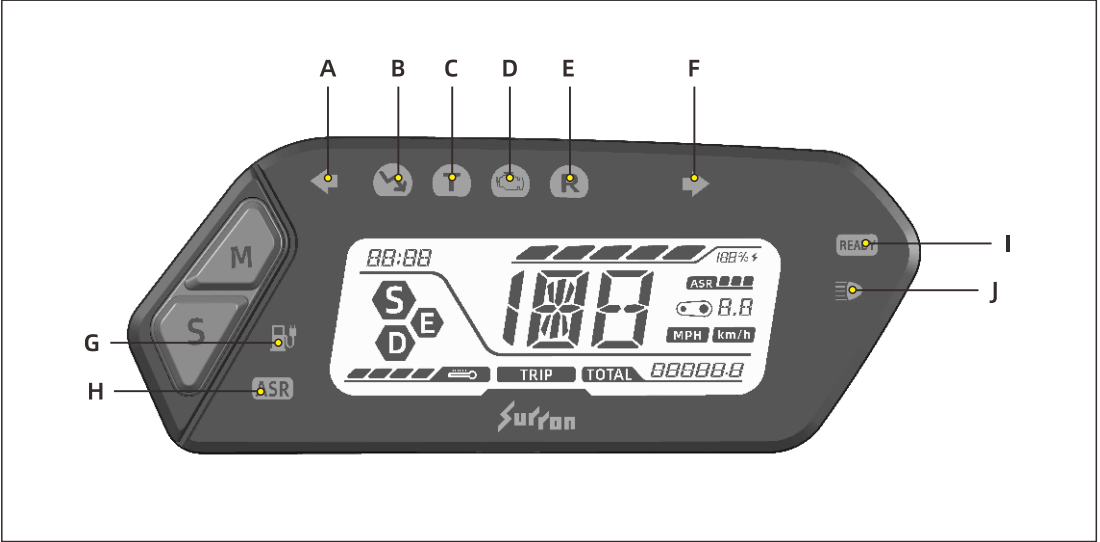

Feature Setting



Dashboard Setting

5.1

The features and displays on the dashboard can be customized to your personal preferences by using the **A** and **B** buttons on the Handlebar Control.

A. Mode Button (M)

By momentarily pressing or holding the **M** button you can reset fields and toggle through the menus and display options.

B. Select Button (S)

To select the corresponding feature by pressing **S** button when entered the feature menu.

Display - Odometer



Select total or trip mileage:

1. To select the display of total **TOTAL** or trip mileage **TRIP**, momentarily press the **M** button when the dashboard in main display mode and the speed of the motorcycle is 0km/h.

2. When Trip mileage displayed, and the motorcycle speed is 0km/h, the speedometer display area shows the Top speed; the speedometer will instantly display the current speed when the motorcycle starts to moving.

Reset trip mileage and maximum speed:

To reset the trip mileage and maximum speed, simultaneously by pressing and holding the **S** button for more than 2 seconds in the trip mileage mode, when the dashboard in main display mode and the speed of the motorcycle is 0km/h.

Unit Display - Speed



Select Miles per Hour (mph) or Kilometer per Hour (km/h) :

1. When the motorcycle key switch is in OFF, press and hold the **M** button and turn the key switch ON whilst still holding the **M** button for more than 2 seconds, then select between Miles per Hour (mph) and Kilometer per Hour (km/h).

2. **MPH** is displayed when Miles per Hour (mph) has been selected.

3. **km/h** is displayed when Kilometer per Hour (km/h) has been selected.

Display - Transmission ratio

Transmission ratio setting:



When the motorcycle key switch is in OFF, press and hold the **S** button and turn the key switch ON whilst still holding the **S** button for more than 2 seconds, then enter into the transmission ratio setting mode, and “**8.8**” indicator flashes. To adjust the transmission ratio by momentarily press **M** button or **S** button. Momentarily press **S** button to decrease transmission ratio by 0.1 till lowest transmission ratio; Momentarily press **M** button to increase by 0.1 till highest transmission ratio. Press and hold **M** button for more than 2 seconds to save the current setting (automatically save and exit transmission ratio setting mode after no action for 5 seconds).

Feature Setting

Attention

When the speed display on the speedometer is higher than the actual speed, reduced the transmission ratio until meet the actual speed; increase transmission ratio if speed display on the speedometer is less than the actual speed.

Caution

Please change the transmission ratio with cautious. (Stock original transmission ratio is 1.0).

5.2

Time Display



Clock Setting:

Press and hold the **M** button for more than 2 seconds after the motorcycle is switched ON, speed is 0km/h to enter the clock setting mode, the “Hours” will start to flash and ready to adjust; momentarily press **M** button again, the “Minutes” will start to flash and ready to adjust; momentarily press **M** one more time will quit clock setting mode.

When “Hours” is flashing and ready to be set, momentarily press **S** button will increase 1 hour, press and hold **S** button increase will increase “Hours” gradually until

Feature Setting

release **S** button. After finish the “Hours” adjustment, momentarily press **M** button will save current setting and enter “Minutes” setting.

When “Minutes” is flashing and ready to be set, momentarily press **S** button to increase 1 minute, press and hold S button increase will increase “Minutes” gradually until release **S** button. After complete the “Minutes” adjustment, momentarily press **M** button to save the current setting and quit clock setting mode.

5.3

ASR (Traction Control System) Indicator




When you use the **ASR** button to turn the **ASR** ON and OFF or select the **ASR** setting level, the **ASR** level will display as follow:

For description and operation, please refer to “Feature Introduction” , on page 6.2.

ASR Display Explanation	
	non display(ASR turned OFF)
	display(ASR turned ON level3)
	display(ASR turned ON level3)
	display(ASR turned ON level3)

Feature Setting

System Feature Mode Display

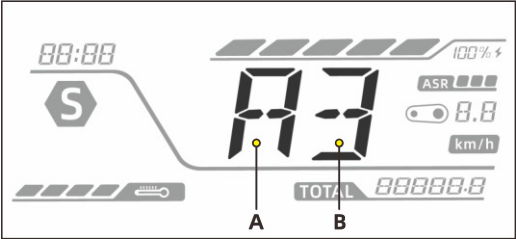

Note: Display one English letter in field A (Different English letters are displayed according to different feature modes).Display one number in field B (Different Numbers are displayed according to different feature modes).

System Feature Mode Setting:

When the motorcycle is in its normal operating mode or with side stand down, press and hold **ASR** button on the Left Combination Switch and **Ready** button in the Right Combination Switch at the same time over 2 seconds to enter the system feature setting mode.

After enter the system feature setting mode:

Momentarily press **ASR** button on the Left Combination Switch to switch between each feature, such as B2, E3, P0, etc.

For example, when feature B2 shown on the dashboard, momentarily press **Ready** button in Right Combination Switch to switch between different setting levels, such as B3, B4, B0, B1, etc. Switch in sequence until find the correct setting level. If there is no action for a long time, system will exit automatically.

The available features are listed below:

1. Level setting for brake energy regenerative feature (**B0 B1 B2 B3 B4 B5**) Factory default at **B2** (feature is disabled in B0, and strengthens in turn from **B1** to **B5**).
2. Level setting for coast energy regenerative feature (**E0 E1 E2 E3 E4 E5**) Factory default at **E3** (feature is disabled in E0, and strengthens in turn from **E1** to **E5**).
3. Level setting for **ASR** feature (**A1 A2 A3**) Factory default at **A2** (feature strengthens in turn from **A1** to **A3**).
4. Setting for brake override feature (**P0 P1**) Factory default at **P0**(feature is disabled in P0, and activated in **P1**).
5. Setting for tilt protection feature (**C0 C1**) Factory default at **C1**(feature is disabled in **C0**, and activated in **C1**).
6. Diagnostic report feature (**T0 T1**) Factory default at **T0** (feature is disabled in **T0**, and activated in **T1**).
7. Throttle sensitivity (**F1 F2 F3**) Factory default **F1** (**F1~F3** sensitivity increases in sequence, only available in sports mode).

5.4

Feature Setting

8. Charging power adjustment feature(**U1 U2 U3**)
Factory default at **U3** (**U1** means the charging power is 480W; **U2** is 750W; Maximum charging power **U3** is 1100W).

9. Crawl Mode Settings (**L1 L2 L3**):Factory default at **L2** (**L1** to **L3** top speeds increase incrementally).

10. Throttle free play setting (**M1 M2 M3 M4 M5**), Factory Default **M2** (decrease sequentially from **M1** to **M5**).

11. SURRON Wheelie Control (SWC) System (**W0 W1 W2**), Factory Default **W0** (**W0**--OFF, **W1**--ON, **W2**--Gyroscope Calibration).

Gyroscope Calibration: Prior to calibration, position the Ultra Bee vertically upright relative to level ground and ensure it remains completely stationary. When "**W0**" is displayed in the System Function Settings menu, press and hold the READY button to initiate gyroscope calibration (during which "**W2**" will flash slowly). Maintain the Ultra Bee's complete stillness for approximately 10 seconds throughout the calibration process. Upon successful calibration, the display will transition from slow flashing of "**W2**" to a steady illumination of "**W0**"; if calibration fails, the display will instead transition from slow flashing of "**W2**" to a steady illumination of "**W2**", and the system will automatically revert to its pre-calibration state.

12. Auto-Hold Switch (**Z0,Z1**), Factory Default **Z0** (**Z0**--OFF, **Z1**--ON)

Exit System Feature Mode Setting:

1. Make sure the Key Switch is ON and lift the side stand will exit System Feature Mode Setting
2. If no action in 10 seconds, it will exit System Feature Mode Setting automatically.

Warning


In conditions like aggressive riding or big jump on dirt track or other challenging riding condition, it is recommended to turn OFF the tilt sensor to prevent unintended power cutoffs caused by activation of the tilt protection.

To extend the life span and the safety of the battery pack, when battery state of charge(SOC) is over 95% or battery internal temperature exceed the working condition temperature between 0°C to 50°C, the energy regenerative system will be disabled.

Feature Setting

Feature Introduction

Handbars Controls

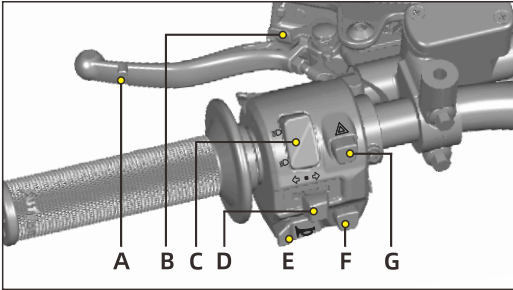

6.1

A. Rear Brake Lever


When you pull or squeeze the brake lever, it will control the rear brake system. When braking, the throttle should be in the idle position. The brake lights are also lit.

B. Parking Brake

When parking on a steep hill or ramp, apply the parking brake to prevent the motorcycle from rolling back. For instructions and operations, please refer to page 6.4 of "Feature Introduction".

C. Headlight High/Low Beam Switch

When the switch is pressed, the headlight changes from low beam to high beam. It remains in the selected position until it is switched back. When in the high beam position, the high beam indicator on the dashboard lights up.

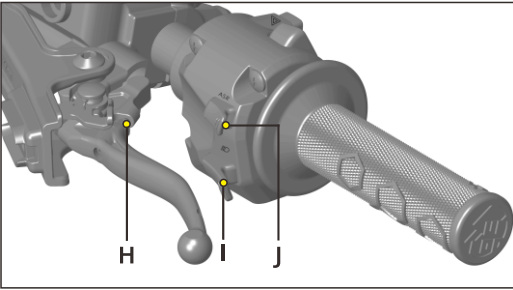

D. Turn Signals Switch

When you push the Turn signals switch to the left or right, the corresponding front and rear Turn Signals will flash. When the Turn signals light switch is turned on, the Turn signals indicator on the dashboard light up.

Be sure to turn and change lane operations in accordance with the local law and regulations. Unlike cars or other vehicle, Turn Signals can only be manually canceled on the Ultra Bee motorcycle. Press the switch and it will return to the OFF (middle) position.

E. Horn Button

When the Key switch is in the ON position, the horn will operate when the button is pressed. The Ultra Bee motorcycle is very quiet when riding, and the horn can be used to warn pedestrians, cyclist, driver or any other personal present.

F. R/T Button (Reverse Mode & TURBO Mode setting)

Reverse Mode: When the READY indicator is illuminated and the throttle is in fully closed position, the motorcycle is fully stopped and speed is zero, press and hold the R/T button, the reverse indicator R on the dashboard will illuminates, the Ultra Bee motorcycle will enter the Reverse mode.

Once enter the reverse mode, releasing the R/T button will cut off power. Only when the R/S button is released and the throttle is returned to fully closed position, the system will exit the reverse mode, and the normal riding mode will be functional again. The motorcycle will vibrate slightly as a reminder when entering or exiting reverse mode.

TURBO Mode: Under in sports mode, when the Turbo mode indicator on the dashboard is illuminated, rapidly pressing the R/T button twice to enter Turbo Mode.

CAUTION

Each use of Turbo mode lasts for about 10 seconds, and timing begins only when the throttle is turned beyond one-third of its travel range. It can be used twice in a row; after using Turbo mode twice in a row, the system will enter a cooling period of 60 seconds, and Turbo mode indicator is off

Feature Introduction

G. Hazard Warning Lamp Switch

When the switch is pressed, the front and rear turn signals are all flash to warn others of situations, which include needing to stop or park under emergency conditions. When pressed again, the switch resets and the turn signals go out. (This is the headlight high beam switch on Ultra Bee X version)

H. Brake Lever Adjuster

Adjustment nut used to set brake lever position, by using 2.5mm hex key and 8mm open end wrench to adjust the brake lever position to fit the rider's riding habit.

I. Overtaking Button

This switch is self-return switch button. When the headlight is in the low beam position, press the button, the high beam is on, high beam indicator on the dashboard also illuminates. Release the button, high beam is off.

J. ASR (Traction Control System) Button

The Acceleration Slip Regulation (Traction Control System) can be adjusted by the ASR button in the left combination switch.

ASR button is located behind the left combination switch, trigger switch.

ASR mode on and off: Press and hold the ASR switch to


6.2

Feature Introduction

turn the ASR function on or off.

ASR level display: Short press the ASR switch once and the current ASR level will be displayed on the dashboard accordingly.

ASR level switching: Short press the ASR switch twice to cycle through the ASR levels.

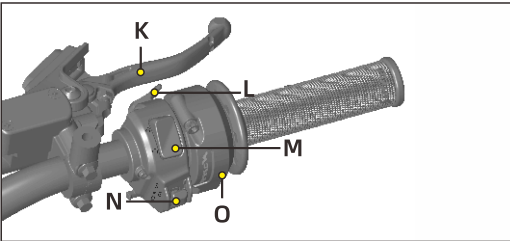

K. Front Brake Lever


When you pull or squeeze the brake lever, it controls the front braking system. When braking, the throttle should be in the idle position. The brake lights are also lit.

L.READY Button

When the motorcycle is fully set up, press the READY button once while it is in the non-READY state to enable the riding mode. The same button can also be utilized to adjust SURRON Wheelie Control system. For comprehensive guidelines and usage details, refer to the Function Introduction section on page 6.7.

M. Motor Stop Switch

When pressed A on the top of the switch, it will cut off the power supply for the power train. The MCU remains in the no power output state until the B on the bottom of the switch is pressed. The switch does not switch off all operational functions, only cut off the power to the power train.

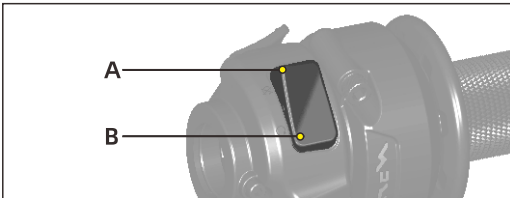


N. Riding Mode Switch

The Riding Mode Switch toggles between SPORT, ECO and DAILY riding modes. For instructions and operations, please refer to page 6.4 of "Feature Introduction".

O.Throttle Control

The throttle sensitivity level can be adjusted in the System Feature Mode, please refer to page 5.3 for details.

Riding Mode Switch

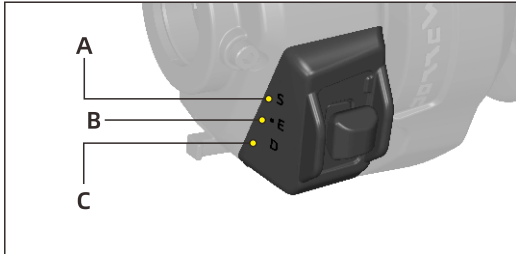

The Riding mode includes SPORT mode S, DAILY mode D and ECO mode E. You can switch among Riding modes while riding, and there will be specific icon showing on the dashboard. There's also a special L crawl mode for specific scenarios, adjustable in three levels.

A. SPORT Mode S

Slide this switch to the top to enter the SPORT mode. This mode has the strongest power output and acceleration ability. It is highly recommended being used in trail or any off-road terrain. Users are strongly recommended to use this mode only after getting familiar themselves with the Ultra Bee motorcycle.

B. ECO Mode E

Press this switch in the middle to enter ECO mode. In this mode, the power and acceleration ability are much reduced, the Ultra Bee motorcycle is much easier to ride and maximized the cruise range.

Feature Introduction

C. DAILY Mode D

Slide this switch to the bottom to enter Daily mode. In this mode, the power output is reduced and acceleration is more gent, so that is suitable for daily riding.

Crawl Mode (L Mode)

This mode significantly reduces the vehicle's maximum speed while maintaining high torque, suitable for slippery slopes, forest roads, etc. It has three top speed levels: L1, L2, and L3.

Activating or deactivating Crawl Mode, as well as switching between gears, is only possible via the system function settings.

Entering crawl mode automatically turns off the ASR (traction control) function. The speedometer area will display the current crawl mode level when motorcycle speed is below 2 km/h. The S/D/E riding mode icon won't be shown until you exit crawl mode.

Feature Introduction

SURRON Wheelie Control (SWC) System

The SWC system is designed as a specialized feature, requiring riders to have appropriate motorcycle control skills for effective operation. The SWC system operates intelligently, relying on gyroscope-based posture sensing to manage the pitch angle, enhance rider safety, and support skill development. The maximum acceleration power depends on the throttle input provided by the rider. To prevent potentially hazardous situations, the system modifies the forward torque and applies reverse torque when the motorcycle's pitch angle nears the preset threshold, maintaining the angle within a safe range.

The SWC system can be activated or deactivated by modifying the system function settings. For detailed operating instructions, refer to page 6.5.

Note

- 1. The SWC system activates only when the motorcycle is free of faults and the battery pack charge level is less than 90%.
- 2. Disabling the ASR and brake override feature is advised to avoid any interference with the operation of the SWC system.

- 3. The REGEN function remains unaffected by the operation of the SWC system.
- 4. All electronic control systems function operates within the mechanical limits defined by the motorcycle's design specifications.
- 5. The SURRON Wheelie Control (SWC) System is designed exclusively as a safety-assist mechanism with certain operational and control limitations. It is not a substitute for the rider's own technical expertise, judgment, or sense of responsibility. Riders are expected to thoroughly comprehend the system's functional constraints and exercise caution by riding responsibly within their skill level, taking into account external factors like terrain and weather conditions.
- 6. Once the SWC system is turned off, the pitch angle control feature will no longer be active. Riders are advised to operate the motorcycle with heightened caution.
- 7. The SWC system helps the motorcycle operate within its physical capabilities but cannot surpass its inherent physical limitations.
- 8. Electric motorcycles, with their instant high

Feature Introduction

- torque, are more susceptible to wheelies when compared to traditional gasoline-powered motorcycles. To ensure safety, it is important to configure the wheelie control system level and pitch angle properly. Avoid setting the angle too high, as this could increase the risk of accidents.
9. When the motorcycle does not meet the conditions required to activate the SWC system, it will automatically exit the system. In this case, the power reduction indicator on the instrument panel will light up, and W1 will begin to flash rapidly. Reset the emergency shutdown switch or restart the electronic control lock to transition back to the W0 state.
10. Ultra Bee is equipped with a reverse protection system. If the reverse speed surpasses 3 km/h, the SWC system will momentarily disable itself.

Warning

- 1. Avoid using the horn while operating the SWC system. High-frequency electromagnetic signals could disrupt gyroscope functionality, leading to reduced angle control precision.

- 2. In challenging conditions like off-road terrain or hill jumps, the SWC system should be deactivated to avoid hindering riding performance.
- 3. When using the SWC system, it is essential to wear appropriate protective gear, operate in a flat, enclosed, and secure area, adhere strictly to local laws and regulations, and avoid engaging in unsafe riding practices on public roads.
- 4. The SWC system does not eliminate the inherent risks involved in operating a motorcycle. SURRON's responsibility is confined solely to manufacturing or design defects as outlined in the warranty terms. Engaging the SWC system for practicing or performing competitive techniques is considered voluntary rider action. Any injuries or property damage resulting from such use will be entirely the rider's responsibility, and SURRON will not be held liable in any capacity.

Feature Introduction

After activating SWC system and exiting menu, the speed display area on the dashboard will alternately flash "Nx XX" (such as N1 35) for 2 seconds, and then display Nx steadily. To remind rider that the SWC system is currently functioning. Nx refers to the designated gear position within the SWC system, and XX represents the predefined pitch angle assigned to that mode. Only when the throttle grip is fully released and back to idle position and the speed is zero can shifting the wheelie mode and angle settings be performed for the SWC system.


The SWC system operates with two levels, N1 and N2. The specifics are outlined below:

N1 Level (Learning level)

The pitch angle range falls between 15° and 35°. This range is suitable for managing wheelie control during rapid acceleration.

N2 Level (Advanced level)

The pitch angle range falls between 35° and 60° to ensure effective wheelie control at elevated angles.



The level settings and the associated control angles can only be modified once the SWC system is activated.

SWC system switch levels: Double click the "READY" button, then circle through N1 → N2 Level.

SWC system angel setting: Long-press the READY button to enter the wheelie angle setting for the current level, the current angle will be displayed steadily. At this moment, click the READY button to increase the angle. Press and hold the READY button again or if there is no operation for 5 seconds, the system will automatically save and exit the wheelie angle setting. When you exit without long-pressing READY button, the selected angle will automatically be saved.

Feature Introduction

The SWC system is an optional function and can be turned off.

SURRON clearly mentions:

This system does not guarantee the prevention of accidents or injuries.

We will not be held responsible for any property damage arising from the following situations:

1. Wheelies when the system is deactivated.
2. Severe negligence in ignoring clear warnings.
3. Making unauthorized modifications without SURRON's approval.
4. Operates under overload despite explicit warnings.

Note

1. Liability for personal injury is disclaimed only as allowed by law. This limitation of liability does not extend to damages resulting from product defects.
2. Riders are required to thoroughly read, understand, and agree to all precautions, warnings, and functional limitations detailed in this manual prior to operating the SWC system. Any improper use or incorrect setup due to a lack of understanding of the system instructions will be the rider's sole responsibility.
3. SURRON Wheelie Control system is not intended to encourage speeding, riding beyond rider's abilities, or engaging in reckless behavior that ignores terrain, weather, load conditions, or relevant regulations. Although the system is designed to regulate pitch angles, it cannot ensure safety in all extreme riding scenarios. Riders are required to remain cautious and aware of potential risks at all times. The rider assumes full responsibility for any direct or indirect damages caused by ignoring warnings or

Feature Introduction

6.9

adopting unsafe riding habits, including but not limited to speeding, reckless driving, riding under the influence, failure to use safety equipment, or disregarding system alerts. Such damages may include personal injury, property damage, or psychological harm. SURRON disclaims any liability for these outcomes to the maximum extent allowed by law. This disclaimer does not affect liability related to personal injury that cannot be excluded under applicable laws.

4. For optimal performance and safety of the SWC system, it is essential to use original manufacturer-certified components like tires and chains. Using non-certified accessories could diminish the system's effectiveness and potentially lead to safety risks. Any consequences resulting from such usage will be the sole responsibility of the owner.

5. The gear settings for the SWC system are functional across all drive modes, except crawl mode. It is advised to choose gears and drive modes that align with your riding preferences and the specific terrain conditions.

Warning

1. Improper handling or deviation from the system's designated operating procedures may lead to accidents or damage, for which SURRON holds no responsibility.
2. Riders are advised to operate within their skill limits and should not rely entirely on the SWC system to navigate difficult situations or take unnecessary risks.
3. The SWC system's performance might be compromised in specific conditions, including loose sand, deep mud, or steep inclines.

Feature Introduction

6.10

Note

1. It is recommended to turn off this switch during intense riding activities such as racing, forest trails, and jump to prevent accidental operation.
2. Auto-hold function cannot be activated when the motorcycle has power system error.
3. The Auto-Hold function remains operational even when the emergency stop switch is activated.
4. If one brake lever is already engaged, the Auto-Hold function cannot be activated using the other brake lever.

Auto-Hold Function




To improve the riding experience, the Ultra Bee features an Auto-hold function.

The Auto-hold function can be activated or deactivated by adjusting the system settings. For detailed instructions, refer to page 5.4.

Activating Auto-Hold function: To enable Auto Hold mode, rapidly press the brake twice while the vehicle is stationary. Once activated, the speedometer will display a constant "H" indicator. In this mode, the rear wheels stay locked to prevent rolling back, and the motorcycle remains in READY mode.

Deactivating Auto-Hold function: To deactivate Auto-Hold function, you can do one of the following: rapidly press the brake twice, twist the throttle grip to accelerate, or turn off the ignition switch. Once the mode is deactivated, the "H" indicator will no longer be displayed.

Parking Brake Reminder

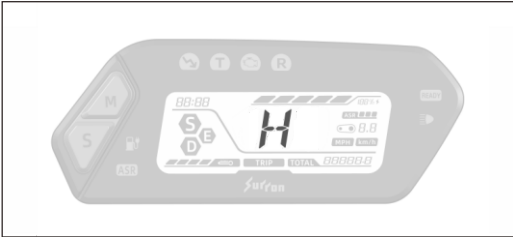


To ensure riding safety, if you start with the brake lever engaged, the speed display on the instrument panel will flash “H” as a warning. This flashing will persist if you begin riding without releasing the brake lever. Once the brake lever is fully released, the “H” indicator will stop flashing and disappear from the display.

Note

When the motorcycle is stationary with the speed at zero and the brakes are continuously applied for an extended duration, the system identifies this as the Auto-Hold state, causing flash “H” on the instrument panel. If the rider twists the throttle grip without disengaging the mechanical brake lever or releasing the brakes, the motorcycle will still generate power output; however, the flashing “H” will remain as a warning indicator.

Parking Brake Operation

Ultra Bee electric motorcycle is equipped with a parking brake. When triggered, the parking brake system will prevent the electric motorcycle from rolling forward or backward. There are three gears for parking brake intensity, which should be selected according to different scenarios.

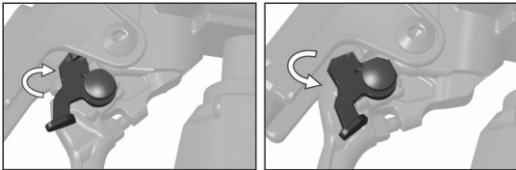

A. Parking Brake On


Squeeze the rear brake lever and push the parking brake lever, the brake gear will into the parking brake limiting slots, and release the rear brak

B. Parking Brake Off

Squeeze the rear brake lever, the parking brake lever will automatically pop out of from the parking brake limiting slots.

Feature Introduction

6.13

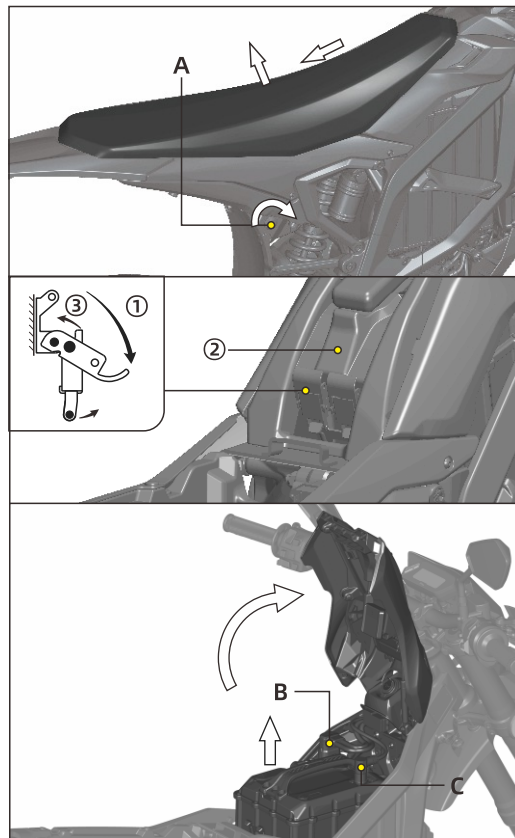

Battery Pack Removal

1. Insert the key into the seat lock switch A and turn the key according to the arrow direction to unlock the seat lock.
2. After the seat springs up, lift the rear end of the seat up slightly, and then pull the seat backward to remove the seat according to the arrow direction.
3. Press the battery compartment cover ① down, push two battery compartment cover clamp toggles ② downward and flick the latch of two clamps ③ forward respectively to disengage the latch from the hook, and then open the battery compartment case cover according to the diagram.
4. Remove the blue communication plug C and then the orange power plug B. Make sure to disconnect the plug carefully and vertically to avoid damaging the connectors.
5. Lift up the battery pack to remove the battery pack and store it in a safe place.

Warning

Do not change the installation steps of the communication plug and the power plug at will. Remember not to connect or remove the power plug while the communication plug is still plugged in. As the battery pack is a high-voltage components, wrong installation steps may cause severe damage or even personal injury.

Feature Introduction


6.14

Battery Pack Installation


1. Open the battery compartment cover and put the battery pack in the battery compartment.
2. Connect the orange power plug B first, and then the blue communication plug C. Make sure to insert the plug carefully and vertically to avoid damages.
3. Close the battery compartment cover according to the arrow showing on the diagram and press the battery compartment cover ② down, then flick the latch of two clamps ③ backward respectively to engage the hook in place, and push two toggles ① upward to lock the battery compartment cover.
4. Push the positioning slot at the front of the seat into the front positioning bushing on Ultra Bee body, then align the hook in the middle of the seat with the positioning bracket on subframe. After that, push the seat forward in the direction of the arrow shown in the figure to install the positioning slot and hook in place. Press the rear end of the seat down to lock the seat.

Warning

Before removal or installation of the battery pack on the Ultra Bee motorcycle, the key switch must be in the OFF position, so that the whole motorcycle is in no power condition.
The battery pack discharge plug must be plugged in and out with the battery communication cable plug disconnected, otherwise it may cause vehicle damage or even personal injury

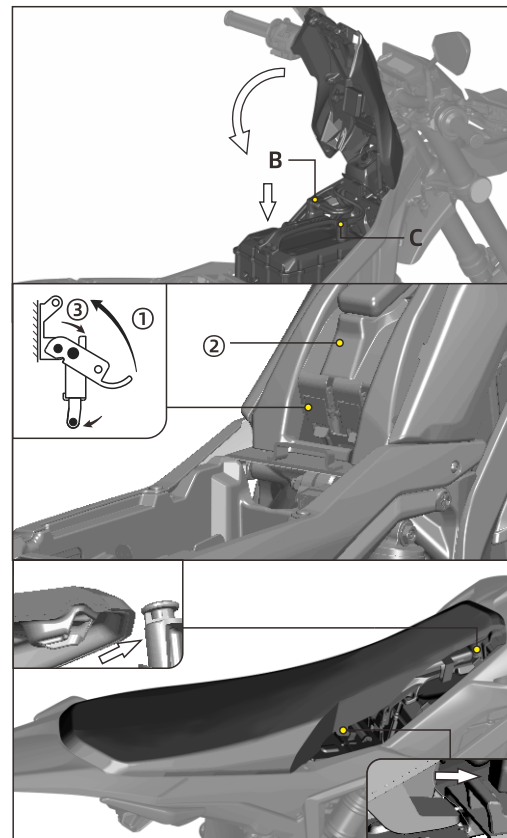


Charger Storage

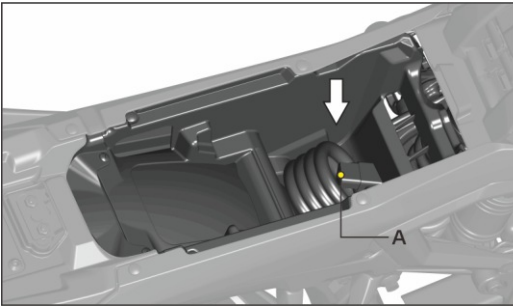

6.15

In order to provide Ultra Bee rider a better experience, there is a storage room designed on the Ultra Bee, which can be used to store the charger or other items.

1. Remove the seat. For description and operation, please refer to "Battery pack removal" .
2. Remove the input cable A from the charger and place it into the storage compartment.
3. Place the charger B in the storage compartment upside down (As shown in the figure, the direction of the charger is indicated by arrows and labels.) and store the output cable of the charger at the back of storage compartment. There is positioning structure of the charger designed for fixing the charger inside the storage compartment.
4. At last, install the seat back on the motorcycle, make

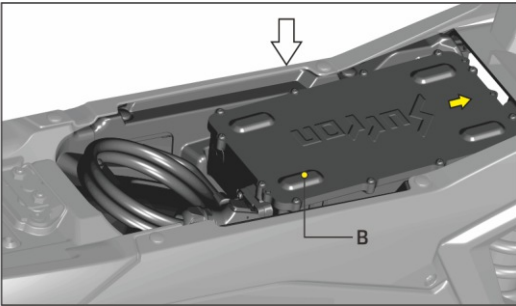


sure the buffer foam on the bottom of the seat is fully secured with the charger. For description and how to install the seat, please refer to "Battery pack installation".

Note

When installing the seat back in, make sure that the charger and cables are stored secured in place to avoid damages to the cable or charger.

Instrument Clock Battery

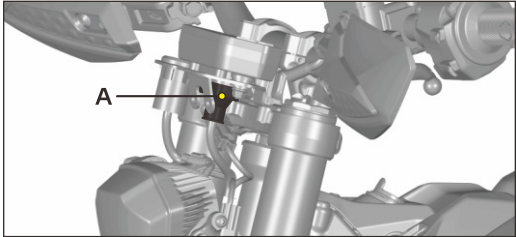

To keep the clock running correctly, there's a Cr2032 battery inside the dust cover. Battery needs replace if the clock not save time or running accurate time.

6.16

T-BOX Binding

If your vehicle has T-BOX installed, please visit the Download Center of Surron official website. Download the Surron App, install and connect the device to use.



Scan this QR code to enter the Download Center.

Manually enter IMEI code or scan barcode/QR code, please refer to "Security Information" on page 2.5

Starting and Operating

Check Before Riding

Before operating the electric motorcycle, please check the following items to ensure that the Ultra Bee electric motorcycle is in operational condition:

Battery pack

Check that the battery level displayed on the battery pack or dashboard is sufficient enough to support your riding. We recommend you to fully charge before your next trip.

Chain

Check the chain tension and condition. Adjust or replace if necessary. Please refer to "Chain" on page 10.9.

Brake system

Squeeze the brake lever and push the motorcycle to see if the front and rear wheels are fully locked. You should be able to lock the wheels completely by braking.

Throttle

When the key switch is in the off position, twist the throttle and release it to check whether the throttle is move smoothly and return to idle freely.

Tires

Check the tire pressure and tread depth of the tires.

Check the cold tire pressure, maintain the correct tire pressure, and check for damage and abnormal wears of the tire surface. As described on page 10.1, when the tread depth is reached the warning mark on the tire, please do not ride the motorcycle and replace the tire immediately.


Warning

Unusual tire pressure is a common reason that cause of tire failure, and may cause severe tires issues or loss control of the electric motorcycle, which may result in serious personal injury. Check the tires regularly to ensure perfect tire condition.

Electrical System

Check whether the headlight, turn signals lights and brake lights/taillights are functioning properly.

Key Switch

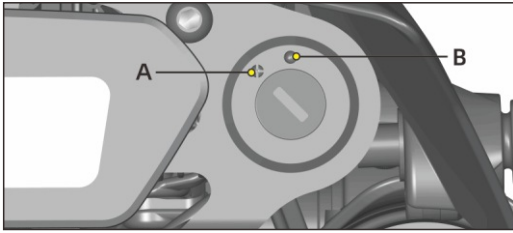

This is a two-position switch located on the right side of the dashboard. The functions listed below:

OFF A

ON B

OFF position

This position is to turn off the Ultra Bee electric motorcycle, thereby turn off all the electrical system. The key can also be removed from this position.

ON position

This position is to turn on the Ultra Bee electric motorcycle. The following changes occur when switch to this location:

Dashbord ON.

Headlight ON.

Taillight ON.(Not available for X version)


Operate Key Switch:

1. Insert the key into the key switch and turn clockwise to switch the key from OFF position to ON position, then start the Ultra Bee electric motorcycle.
2. When the Ultra Bee electric motorcycle is started, turn the key counterclockwise to switch the key from ON position to OFF position, then the Ultra Bee electric motorcycle is turned off.

Starting and Operating

Remove the key immediately after turn off the key switch and safely park the motorcycle to prevent the vehicle being stolen.

Steering Lock

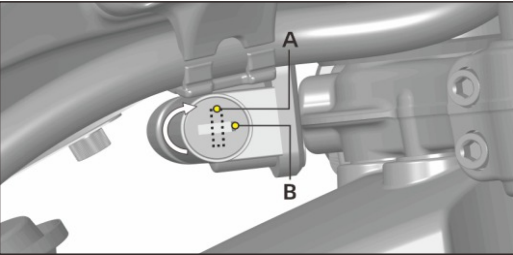

This is a two-position switch located on the back side of the lower triple clamp. The function instruction is as follows:

Lock A

Unlock B

Lock Steering Lock:

1. Turn the handlebar to the left till the limit.
2. Lock the Ultra Bee electric motorcycle by inserting the key into the steering lock and turning it clockwise.

3. Remove the key.

Unlock Steering Lock:

1. Unlock the Ultra Bee electric motorcycle by insert the


Starting and Operating

key into the steering lock and turn it counterclockwise.

2. Remove the key.

Lock the steering lock after parking the motorcycle to prevent unauthorized use or been stolen.

Seat Lock

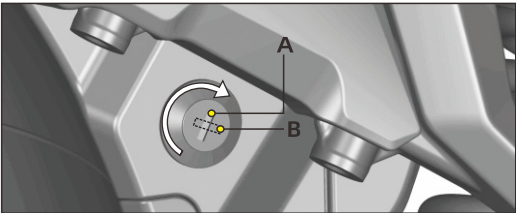

This is a two-position self-return switch located on the back of the rear shock absorber. The function instruction is as follows:

Lock A

Unlock B

Operate Seat Lock:

1. When in lock position, insert the key into the seat lock and turn clockwise to switch the key from lock position to unlock position. When the key is in unlock position, the seat can be removed.
2. When releasing the key, the key will automatically return from unlock position to lock position, and the key

can be removed when in lock position.

Starting and Operating

Starting

1. Turn the key switch from OFF position to the ON position.
2. Confirm the battery percentage display on the dashboard.
3. Press the motor stop switch to the start position.
4. Gently squeeze the left rear brake lever to make sure that the parking brake is unlocked.
5. After confirming there are no obstacles and passing vehicles in the surroundings, lift the side stand, press the READY button to enter the READY mode, and the green READY indicator on the dashboard will light up, and twist the throttle inward (counter clockwise) to increase the speed and start riding.

Braking

The brake levers are located on the left and right handlebars.

When you pull the right brake lever, it controls the front brake.

When you pull the left brake lever, it controls the rear brake.

Warning

Progressively using the brakes and controlling the applied force on the brake lever will gradually stop the electric motorcycle without locking the wheels. Your electric motorcycle is a powerful vehicle, so it is strongly recommended that you practice adequately and get familiar with all the safe emergency stop operations.

Parking

1. When the throttle is in the closed position, press the motor stop switch to the closed position.
2. Put side stand down in case of the vehicle tilt over.
3. Turn the key switch to the OFF position and remove the key, and keep it in a safe place.
4. Lock the parking brake to prevent the motorcycle from moving due to the gradient (it is recommended to use the parking brake no matter parking on flat ground or steep hill, this is a good parking habit and will keep your motorcycle safe).

Note

After each ride, please check the remaining energy and charge the battery pack in time.


Starting and Operating

Temperature Indicator

The electric motorcycle power system will generate heat during operation, to keep the Ultra Bee electric motorcycle can continuous operation. The Ultra Bee electric motorcycle will self-monitoring the temperature of each component of the power system, displayed on the dashboard, to ensure the power system operating through a comprehensive multiple thermal management strategy.

Temperature indicator on the dashboard A, indicates the power system temperature (battery pack, motor and MCU).

When power system temperature is over the temperature limitation, the entire temperature indicator A will start to flash.

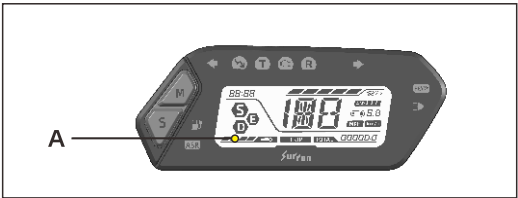

Starting and Operating


Front Fork Adjustment

Rebound damping

Adjust the rebound damping by turning the knob A at the bottom of the left and right front fork. The symbol "+" means increasing rebound damping, and the symbol "-" means reducing rebound damping.

Turn the rebound adjusting knob A clockwise in the "+" direction to increase the rebound damping, resulting in reduced the fork rebound speed.

Turn the rebound adjusting knob A counterclockwise in the "-" direction to reduce the rebound damping, resulting in increased the fork rebound speed.

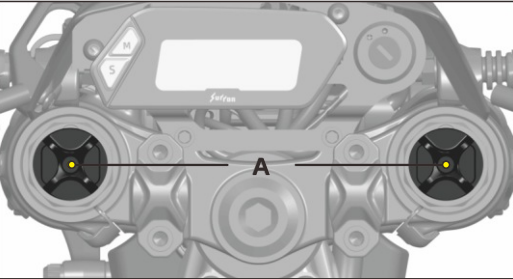

Note


The appearance of front fork may vary in different brands, please refer to the actual product.

Compression Damping

Use a flat-blade screwdriver to turn the screws B on the bottom of the left and right front fork feet to adjust the compression damping. The symbol "+" means increasing compression damping, and the symbol "-" means reducing compression damping.

Turn the adjusting screw B clockwise in the "+" direction to increase the compression damping.

Turn the adjusting screw B counterclockwise in the "-" direction to reduce the compression damping.

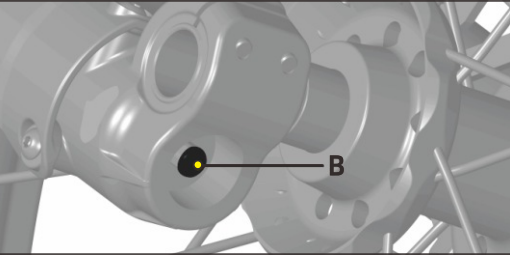

Note

The appearance of front fork may vary in different brands, please refer to the actual product.

Keep the left and right fork leg setting symmetric when adjusting the rebound and compression damping.

Starting and Operating

Rear Shock Adjustment

Compression damping


The compression adjustment knob A is located on the top right side of the rear shock absorber. "+" is printed on the adjusting knob to indicate increasing compression damping and "-" indicates reducing compression damping.

Turn the adjusting knob A clockwise in the "+" direction to increase the compression damping.

Turn the adjusting knob A counterclockwise in the "-" direction to reduce the compression damping.

Note

The appearance of rear fork may vary in different brands, please refer to the actual product.

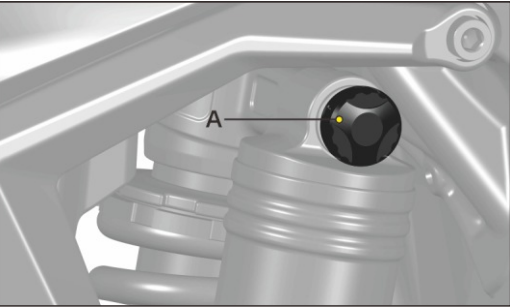

Rebound Damping



The rebound adjustment screw B is located at the bottom right side of the rear shock absorber using screwdriver to adjust the rebound. "+" printed on the adjustment screw means increasing rebound damping, "-" means reducing rebound damping.

Turn the adjusting screw B clockwise in the "+" direction to increase the rebound damping, resulting in reduced the shock rebound speed.

Turn the adjusting screw B counterclockwise in the "-" direction to reduce the rebound damping, resulting in increased the shock rebound speed.

Note

The appearance of front fork may vary in different brands, please refer to the actual product.

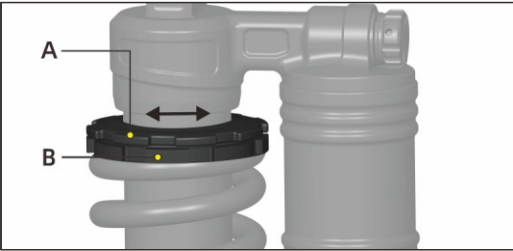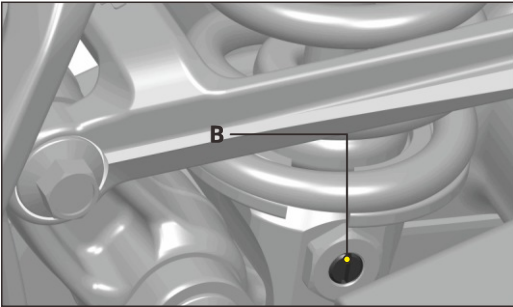

Note

The damping and spring preload should be adjusted reasonably according to the road conditions and the weight of the rider. Avoid adjusting the damping to the maximum limit value at all time, otherwise the shock absorber may malfunction or even lead to fatal or serious injury.

Rear shock preload adjustment

1. Using an adjusting wrench to loosen the spring lock ring A.
2. Use an adjusting wrench to turn the adjustment ring B.
3. Rotate the adjustment ring B counterclockwise to reduce the preload on the spring and rotate the adjustment ring B clockwise to increase the preload of the spring.
4. Using an adjusting wrench to tighten and lock the spring lock ring A.

Power Management

Battery Pack

The Ultra Bee electric motorcycle uses high-performance and high rated lithium-ion battery which can be used in the ambient temperature range of -20°C ~ 45°C, the best working condition is when ambient temperature is between 10°C ~ 30°C. Extreme low or high ambient temperature will affect the battery pack performance and life span. Do not use the battery pack at temperatures beyond the allowable range, and do not charge the battery pack below 0°C.

The charge time of the battery pack is about 4.5h in normal ambient temperature.

When the ambient temperature is too low, the performance of the battery pack will be affected. It is normal that the range will be reduced a little, and the performance of the battery pack will automatically recover after the temperature rises back to working condition.

CAUTION

When the battery State of Charge (SoC) is less than 30% and the battery pack is not used for more than 7 consecutive days, the battery pack will enter a low-power sleep state and turn off the power output. In this case, the T-BOX may not be able to connect to the Internet. At this time, the

battery pack must be activated by connecting to a charger for charging before it can supply power normally.

When not in use for a long time, please charge the battery pack's SoC to 60% to 80% for storage and check the remaining power every month. Charge the battery pack once when it is less than 30% to avoid affecting performance and causing permanent damage.

It is strictly prohibited to wash the battery pack with a high-pressure water pump or compressed air, especially all the connectors and cables. Do not put the battery fully inside water. The water should not exceed the height of the center of the wheel if riding in places having high water level, otherwise it may cause water ingress in the battery pack, internal short circuit and permanent failure of the battery pack.

If water ingresses into battery pack or battery pack had other faults, it is strictly prohibited to charge the battery pack again. It may cause the risk of fire hazard, combustion and explosion of the battery pack and lead to fatal or serious injury.

The battery pack is water resistant and sealed with a high voltage circuit inside. If the external structure is damaged, this will reduce the water-resistant

performance of the battery pack. If the water-resistant structure is damaged, please contact the authorized Surron dealer or Service department. It is strictly prohibited for customers to open or disassemble the Lithium-ion battery pack to avoid potential damage and serious danger.

Warning

There is a risk of electric shock when working on high-voltage components. The motorcycle's high voltage system has no user serviceable parts. Work on high-voltage components requires certain qualifications, special training and tools, or by law in some country or region.

Note

The battery pack contains harmful components and elements to the environment, so please dispose the battery pack properly and in compliance with the applicable regulations. Never throw the battery into a household trash bin.

Power Management

cold weather condition

Riding the Ultra Bee electric motorcycle in cold weather will not have a permanent effect on its battery pack; however, the rider may notice a reduction in range and power due to the effect that low temperatures have on the amount of energy that can be released by the battery pack.

Therefore, the Ultra Bee electric motorcycle may temporarily reduce its range by about 30% when used in an environment below 0°C compared to an environment at 25°C. In extremely cold weather, the Ultra Bee electric motorcycle may also temporarily reduce power and fail to reach its maximum speed.

Storage temperatures below -20°C may cause permanent degradation of the battery pack performance. Above this temperature and following the long-term storage guidelines (refer to "Long-term storage of vehicles" on page 10.13) will ensure that the battery pack is not permanently damaged during winter storage.

Hot weather condition

Using the Ultra Bee electric motorcycle in high temperatures will not cause any noticeable performance changes. However, when the battery pack temperature is above 55°C (based on the battery temperature sensor), the battery management system will shut down the battery pack output to avoid potential damage to the battery pack.


Power Management

In the case of a battery pack temperature above 50°C, the charger will reduce the charging current to protect the battery pack, which may increase the charging time. When the battery pack temperature exceeds 55°C, the battery management system will no longer allow charging.

Caution

Please do not place the electric motorcycle or its battery in an environment temperature higher than 41°C or in direct sunlight for an extended period of time, which may cause the degradation of battery performance.

Power Supply and Charging

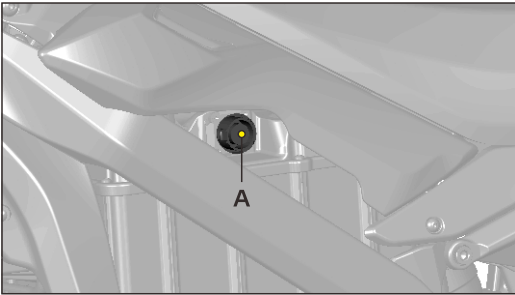

Before charging, please check whether the input voltage range of the charger is compatible with the grid voltage, AC 85 ~250V / 200~240V.

Before charging the battery, ensure the battery is placed on a flat, firm surface, and the battery charger is adequately ventilated.

Before charging, please check whether the load power of AC power network can meet the power requirements of battery charger.

When charging, please connect the battery pack plug first, then connect the AC power plug.

If you ride a long time in hot weather (>36°C) or spend a majority of your ride at high speeds, do not charge right after the ride as battery pack will not be charged in “hot” . Allowing your battery pack a few hours to cool down prior to recharging will prolong its life. You may also benefit from off-peak electricity rates by waiting until the evening to charge.

You can directly plug the charger into the battery charging port A on the left side of the motorcycle.

The charger will turn off automatically when the battery pack is fully charged. Please disconnect the power supply of the charger and disconnect the charging plug.

Power Management

Charging Precautions

1. When charging, please put the motorcycle in a safe place and beyond the reach of children.
2. Avoid using the battery pack when it has just finished charging. It is highly recommended to put the motorcycle or battery pack in a well-ventilated environment and let it cool down for at least 10 minutes after it is fully charged.
3. It is prohibited to cover any object on the charger during charging. This charger is for indoor use. Please use it in a dry and well-ventilated environment.
4. After charging, please put the charging socket protection cap back on.
5. Once the charging process is finished, promptly disconnect the charger from the battery pack. Doing so helps prevent potential property damage or personal injury that could result from overcharging caused by an extended connection. Additionally, it reduces the risk of accelerated battery capacity loss or total discharge.

Warning

Always charge the battery pack in a well-ventilated environment and far away from any fire hazard. Do not charging in rain, humidity condition, direct sunlight or any other extreme weather conditions.

The battery pack can only be charged with a genuine charger supplied by the original manufacturer or specified charger authorized by Surron. The use of unauthorized chargers or accessories may cause damage or failure of the battery pack, or even lead to fatal or serious injury.

Do not charge the battery pack below 0 °C, otherwise it will damage the battery pack. It can only be charge after the temperature of the batteryack rises back to above 0 °C. The maximum charging temperature inside the battery pack is 55 °C. If the internal temperature of the battery pack exceeds this temperature, it can only be allowed to charge after cooling back to below 55 °C. If the battery pack is discharged rapidly due to heavy duty riding, the internal temperature of the

battery pack may still be higher than 55 °C even the ambient temperature is lower than that.

The battery pack is only allowed to return to normal temperature by itself. Do not use other methods to raise or lower the temperature of the battery pack.

The battery pack may not be able to charge immediately after high power output or high temperature operation. Should let the battery pack cool down for 30 minutes or longer before charging. The battery management strategy does not allow charging when the internal temperature exceed the temperature limitation, otherwise the battery pack might be damaged and reduce the battery pack lifespan.

Serious Warning!

When you find the following situations, please stop charging immediately, disconnect the power supply, and do not use the electric motorcycle. Contact Surron authorized dealer or Surron service department for inspection and service immediately.

Massive mechanical damage to the battery pack or spotted the damage on the case of the battery pack.

Strange smell during charging.

The temperature of the battery pack or charger is too high.

Charging cannot be complete for a long time.

There is no particular fire hazard for this motorcycle when the battery pack is intact, but if the motorcycle or battery pack catches fire, please throw the battery pack into the water to prevent more damage, also inform the local fire department and explain the fire source.

Power System

The Ultra Bee electric motorcycle power system include MCU and motor.

Warning

Customers are not allowed to disassemble the motor without authorization from Surron, otherwise it may cause the position sensor malfunction or damage the corresponding seal which can lead to motor malfunction.

The MCU is a precision high-voltage and high-current electronic component. Incorrect wiring connection and wrong screw torque may cause damage to the MCU or power system.

Disassembling, removing or replacing power system component, cables or connectors can cause severe burns or electric shock that may result in serious injury or death

The power system of the Ultra Bee electric motorcycle must be repaired or replaced by a trained professional technician authorized Surron. Customers are not allowed to disassemble and modify the power system of the Ultra Bee electric motorcycle. It's prohibited to put the power system into the water, otherwise it will

cause severe damage.

Power cables carry high current during operation, do make sure the cables are correctly and firmly connected, ensure that the torque and tightness of cable fastening bolts meet the recommended torque requirements,, and cable insulation also meets the requirements.

Disassembling, removing or replacing power system components, cables or connectors can cause severe burns or electric shock that may result in serious injury or death.

The power system is a 74V high voltage system and the power cable is in orange color for easy identification. During operation, repair and maintenance or cleaning of the motorcycle, it is necessary to ensure that the electric motorcycle and power cables are well isolated.

Maintenance Item

The proper replacement fluids are listed in the table below.

Parts	Oil type	Volume
Brake fluid	DOT4	

Maintenance Records

Please follow the maintenance schedules refer to page 10.1. After each scheduled service or maintenance is performed, record all the information in the Maintenance schedule of this manual.

Scheduled Maintenance

Maintenance of the Ultra Bee electric motorcycle must be scheduled to ensure the safe, reliable performance. The required maintenance schedule that specifies how often you should have your electric motorcycle serviced and what items need attention. If you do not have enough experience or tools, contact Surron authorized dealer nearby you to maintain your motorcycle. Your warranty will be void if damage, malfunctions, or performance problems caused by improper maintenance or repair of the electric motorcycle.

The service intervals in this maintenance schedule are based on average on road riding conditions. Some items will need much more frequent service if you ride in unusually wet, dusty areas, trail or dirt track offroad

riding. Consult your local dealer for recommendations applicable to your individual needs and use. It is recommended that you maintain your Ultra Bee electric motorcycle at least once every 6 months by your local Surron authorized dealer, regardless of the distance ridden.

Maintenance Schedule

To maintain the best condition of your motorcycle, regular inspection and service is required as shown in the Maintenance Schedule table below. The initial maintenance is vitally important and must not be neglected. Where time and mileage are listed, follow the interval that occurs first.

Attention

1. The battery compartment cap gas strut must be used at least once every 5 months.

2. It is recommended to check the tightening torque of all the screw and bolts before every dirt track or trail ride.

Ultra Bee Electric Motorcycle Maintenance Schedule							
Check item	every rider	every 100km	every 500km	every 2000km	every 5000km	every 10000km /12months	every 20000km /24months
Tire(worn)	●						↺
Brake pads (worn)		●	●	●	●/↺	●/↺	↺
Brake disc (worn)			●		●/↺	●/↺	↺
Chain		●/✖	●/✖	●/✖	●/↺	●/↺	↺
Sprocket (front and rear)				●	●/↺	●/↺	●/↺
Primary belt and primary drive pulley				●/✖		●/↺	↺
Battery pack voltage	●						
Dashboard warning code	●						
Front fork and rear shock	●				●/✖	●/✖	
Brake fluid		●		●		●/↺	
Bearing				●	●/✖	●/↺	
Lights	●						
Wheel spokes	●	✖			✖	✖	
Swingarm protection block				●		●/↺	●/↺
Tilt switch				●			
Screw torque				●			

● Check ↺ replacre ✖ adjustment 🔧 manintenance



Torque Management

Check regularly and tighten the following fasteners on the Ultra Bee electric motorcycle according to the specified torque.

Caution: Steering tube lock nut adjustment method:

- 1. Put the motorcycle on the support stand to lift the front wheel off the ground;
- 2. Loosen the steering tube lock nut and the front fork lock bolt on the upper triple clamp;

- 3. Tighten the steering tube to adjust nut to 20N.m and then loosen it by 1/4 turn;
- 4. Tighten the steering tube to lock bolts and the front fork mounting bolts on the upper triple clamp;
- 5. Check whether or not the handlebar turns smoothly and repeat the above operation if necessary.

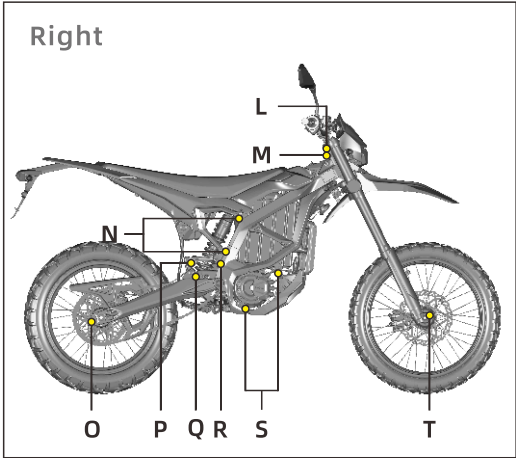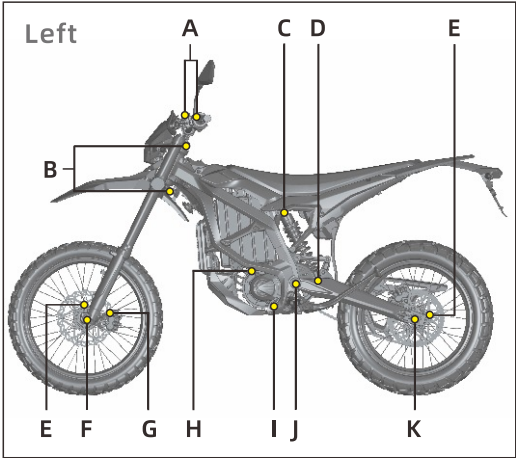

Please refer to page 10.3 Torque management.

	Item	Torque	Specification	Instructions
A	Handlebar installation screws	25N.m	Hexagon socket M8*25	/
B	Front fork installation bolts	13N.m	Hexagon socket M6*25	/
C	Rear shock absorber installation axle top	60N.m	T-shaft bolt M10*1.25-60	/
D	Rear shock absorber installation axle bottom	60N.m	Hexagon flange bolts M10*1.25-50	/
E	Brake disc installation screw	12N.m	Torx pan head screw M6*16	Thread locker needed (e.g. KAFUTER K-0609 or similar products)
F	Front axle	60N.m	Step-shaft axle inner thread M16*1.5-170	
G	Front brake caliper installation bolts	25N.m	Hexagon socket M8*35	/
H	Motor front left installation screw	25N.m	Hexagon socket M8*50	/
I	Motor rear left installation screw	25N.m	Hexagon socket M8*55	/
J	Swingarm pivot	60N.m	Hexagon socket M11*1-230	/
K	Rear wheel axle	140N.m	Hexagon socket M20*1.5-240	/
L	Steering tube locking bolt	70N.m	T-shaft bolt inner thread M20*1*17.5	/
M	Steering tube adjustment nut	/	T-shaft bolt outer thread M30*1*8	See previous caution
N	Subframe installation screw	25N.m	Hexagon socket M8*20	Thread locker needed (e.g. KAFUTERK-0609 or similar products)
O	Rear sprocket installation screw	25N.m	Hexagon socket M8*16	
P	Link rod connecting axle	60N.m	Hexagon flange bolts M10*1.25-67	/
Q	Triangular cantilever installation axle	60N.m	Hexagon flange bolts M10*1.25-75	/
R	Link rod installation bolt	60N.m	Concave cap hex socket screw M10*35	/
S	Motor right installation screw	25N.m	Hexagon socket M8*35	/
T	Front axle locking nut	15N.m	Hexagon socket M6*25	/

Battery Pack

Caution

1. Battery packs are lithium-ion systems that do not require maintenance but need to be recharged from time to time. When not in use for a long time, please charge the battery pack to about 60% ~ 80% of the power storage. You will need to check the remaining power every month. If the battery pack power drops below 30%, it should be recharged to 60%~ 80% to prevent the battery pack from losing activity, which will affect performance and cause damage.
2. The battery pack should be kept away from high temperature environments. Do not store it in high temperature environment or under direct sunlight. When not used for a long time, please store the battery pack in an ambient temperature of 10°C ~30°C.
3. Disposing of the battery packs is subject to local laws. Used battery pack is encouraged to be handled and recycled by professional company or organization and not to be discarded at will.

Warning

Only professionally trained technicians can provide service to the battery pack. Please note

that unauthorized handling of the internal parts of the battery pack may cause serious damage. Do not disassemble without authorization from Surron!


Brake System

This chapter introduces how to maintain the brake system of Ultra Bee motorcycle, covering brake pads (front and rear dedicated brake pads) and recommended brake fluid volume and types for front and rear brake systems.

Brake System HCU

To fill the HCU with brake fluid, a vacuum pump and a filling machine are needed. When users need to bleed air from the HCU. We recommend you to have the authorized Surron dealer to provide professional services.

Brake Fluid Check

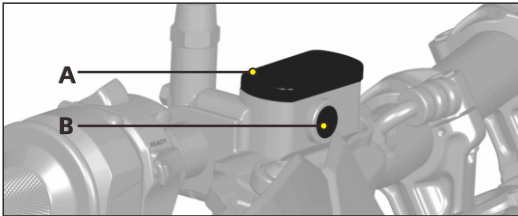

Brake Oil Cup

Check through the oil level inspection window B to observe the level of brake fluid. If the fluid level is significantly lower than one-third of the oil mirror, brake fluid must be added. Before opening the oil cup, please clean all dust or debris on the lid A to avoid contaminating the brake fluid.

A low fluid level may indicate worn brake pads or a leak in the hydraulic system. Check whether the brake pads are worn and/or the hydraulic system is leaking. Only use the new DOT 4 brake fluid in a sealed container.

The steps of adding brake fluid are as follows:

1. Unscrew the two screws on the upper cover of the oil cup, and remove the upper cover of the oil cup and the oil cup gasket.
2. Add new DOT 4 brake fluid.
3. Check the lid seal to make sure that there is no wear or damage, and the position is correct.
4. Install the upper cover screw of the oil cup (torque 2N.m)

Caution

Do not splash the brake fluid on the painted surface, as it may damage the painted surface.

Caution

Spilling brake fluid on plastic products can cause corrosion. Before removing the cover, make sure to put an oil absorbent towel under the main cylinder reservoir. Before checking the liquid level, the Ultra Bee electric motorcycle should be in a flat and upright state and the handlebars should be turned back to ensure that the oil cup is in a horizontal position. When adding new brake fluid, if the brake fluid overflows, it should be removed immediately to prevent contamination of other parts.

Brake Disc Inspection

The thickness of brake disc should be inspected regularly. The minimum thickness is 2.5mm.

Brake Pad Inspection


The brake pads must be checked during the specified intervals outlined in the maintenance schedule, please refer to page 10.2. The remaining thickness of the brake pads can be visually checked from the side of the brake caliper.

If the thickness of the brake pads is less than 4.2 mm, replace the brake pad. If there is any damage to the brake pads, replace both brake pads immediately regardless of the thickness of the brake pads.

Maintenance

Brake Pad Replacement

It is recommended to check and run-in after replacing new brake pads or brake discs to ensure that the brake discs and brake pads adapt and match again. Correct run-in can improve the brake feel and reduce or eliminate brake noise.

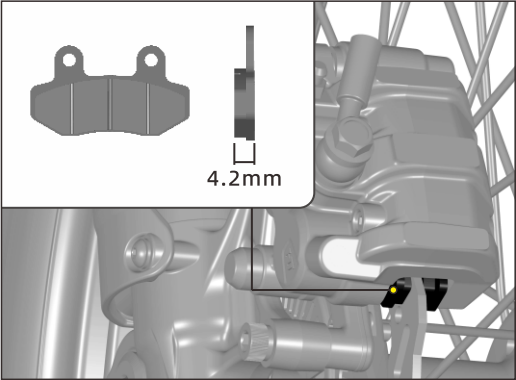

Warning

When using a new brake system or new brake pads, the initial braking force may be too small. Please try to run-in the brake pads and brake discs at low speed and safety to ensure that the brake system provides normal braking force.

Parking Brake

The Ultra Bee electric motorcycle is equipped with a parking brake. When the rear brake lever is in the depressed position, it will lock the rear wheels. Please check the parking brake regularly.


Parking Brake Inspection

1. Raise the Ultra Bee electric motorcycle on the support bench to make the rear wheel off the ground.
2. Firmly hold the rear brake handle.
3. Push the rear brake parking paddles firmly into the parking position until it can no longer be pushed.
4. Release the rear brake handle, and then release the parking brake paddles.
5. The motorcycle can be parked successfully at this time, and different parking gear has different braking force.

Warning

If the parking brake cannot effectively lock the rear wheel, please contact an authorized dealer or Surron after-sales service in time.

Suspension System

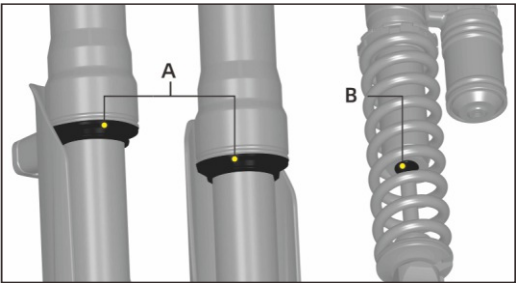

1. It is recommended to clean the surface of the shock absorber immediately after each ride, especially the mud and sand attached to the surface of the main tube. When cleaning with a high-pressure water gun, it is strictly prohibited to flush upwards facing the dust-proof seal A and B, as this will flush mud and sand into the oil seal and cause wear and oil leakage.
2. Do not use flammable or corrosive solvents to clean otherwise it will cause damage to the dust-proof oil seal. It is recommended to use a neutral detergent and a soft cotton cloth to assist in cleaning.
3. It is recommended to apply a layer of lubricating grease on the surface of the main pipe after cleaning to make the surface of the main pipe fully lubricated.

Warning

The shock absorber contains high-pressure gas or liquid. Do not try to tamper with or disassemble the shock absorber. Please avoid impact, high temperature or open flame on the gas cylinder. After riding the motorcycle, the shock absorber and the gas cylinder may be in a high temperature, please avoid being burned. Improper operation of the shock absorber may cause damage or serious personal injury. For maintenance, please refer to the maintenance scheduled on page 10.2 and Page 7.7 for adjustment.

Wheels and Tires

Check the both wheels for the follows:

Bend, distorted or cracked rim.

Impact marks on the rim.

Loosen, bent or missing spokes.

Whether there are cuts, cracks, penetrated, splits or missing tread blocks in the tread or sidewall area.

Tire bulge, bumps or even exposed tire thread or cords.

Maintenance

Whether Tire tread wears unevenly.

The height of the tire installation mark is uneven.

If you find any of the conditions above, please replace the wheels and/or tires immediately.

Warning

Incorrect tire pressure is a common cause of tire failure. Riding long time with incorrect tire pressure may lead to tire damage, separation of the tread or even loss control of the motorcycle, resulting in serious personal injury and damage. Before each ride, check the tire pressure and adjust it to an appropriate tire pressure level. When the tire is cold, use an accurate pressure gauge to check the tire pressure.

Tire Pressure

Recommended	Front wheel	Rear wheel
Off-road tires	225kPa	225 kPa
All-terrain tires	225kPa	225 kPa

Recommended Tire Pressure Table

Note: The recommended tire pressure range for off-road tires is 100 ~ 150 kPa for dirt track or trail riding scenarios.

Chain

Please refer to the maintenance scheduled on page 10.2 for the inspection and maintenance of the chain.

1. Check for chain dirt accumulation, keep the chain and sprockets clean.

2. Check the chain wear, tightness and lubrication.

(1) After turning off the motor stop switch, turn off motorcycle key switch and remove the key from the motorcycle, and use a motorcycle lift stand to raise the motorcycle wheels off the ground. Move the chain up and down by hand and check whether the chain tension is within the recommended range: 10-25mm.

(2) Adjust chain if the chain tension does not meet the specification. When adjusting, first loosen the rear wheel axle nut, and then adjust the left and right adjusting bolts to adjusting the chain tightness within the recommended range.


(3) Use an appropriate amount of chain oil or chain wax to lubricate the chain.

Caution

1. When the chain tension exceeds the recommended range, the chain moves up and down during riding will damage the swingarm protection rubbers on the swingarm. Please adjust it time to prevent

further damage.

2. After adjustment, the left and right chain adjuster marks should be symmetric to the mark on the swingarm.

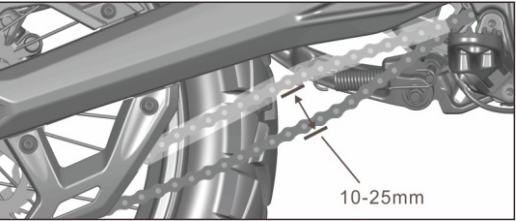


Chain Adjustment Procedure

1. Use a lift stand so that the rear wheel is off the ground, turn off the motor stop switch and remove the key from the key switch.
2. Loosen the rear axle nut C.
3. Loosen the locknut A of the left and right adjusting bolts B.
4. Adjust the left and right adjusting bolts B equally until the chain is adjusted within the specified range.
5. Tighten the rear axle nut C.
6. Tighten the left and right lock nuts A to fix the position of the adjusting bolt B.

Maintenance

7. Test ride the motorcycle.

8. After the trial ride, please re-check whether the chain is adjusted correctly, and re-adjust it if necessary.

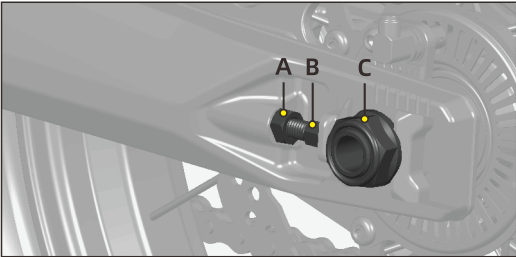

Caution

When adjusting the tension of the chain, adjust the adjusting bolts on both sides equally.

Headlight Adjustment


The angle of the headlights should be checked regularly. It must be re-adjusted after changing the angle of the whole motorcycle at any time because changes in the angle of the whole motorcycle will affect the angle of the headlights. Before adjusting the headlights, the suspension system and tire pressure must be adjusted correctly. The illumination angle of the headlight can be adjusted vertically. If the illumination angle of the headlight is not suitable, it will cause the

Maintenance

beam to point too close or too far.

Headlight angle adjustment:

1. When the headlight is in the low beam position, the motorcycle is perpendicular to the ground.
2. With the operator sitting on the motorcycle, check the beam angle.

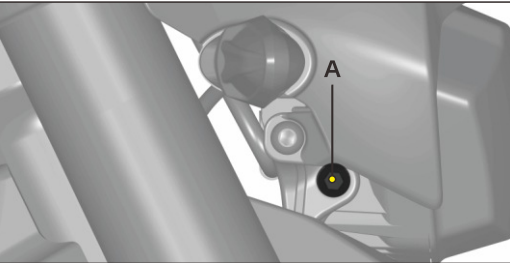


3. To adjust the illumination angle of the headlight, please turn the adjusting screw A which is located at the both sides of the headlight until the correct beam angle is reached.



4. The correct illumination angle is when the near bright and dark cut-off line is 0.7-0.95 meters height from the ground while the motorcycle headlight is 10 meters away.

Light Replacement

When the headlight A/turning signal B/tail light or brake light C is damaged, please contact the authorized Surron dealer for a complete replacement.

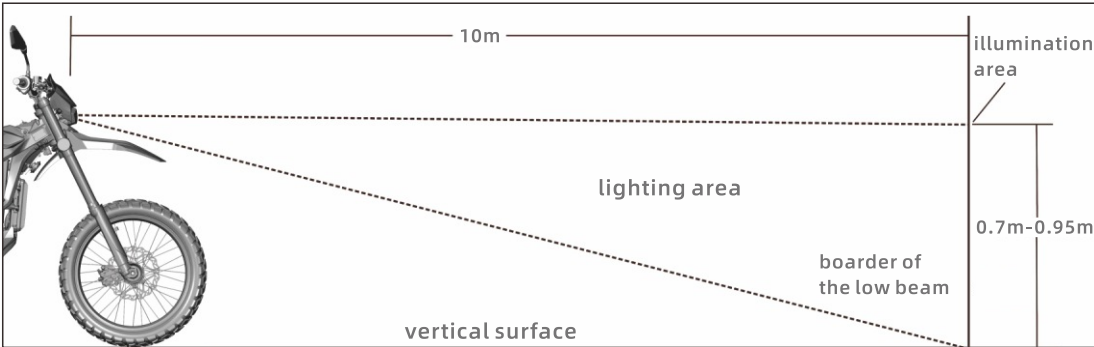

Maintenance

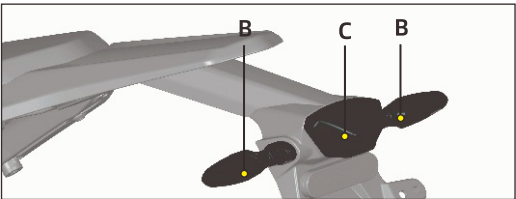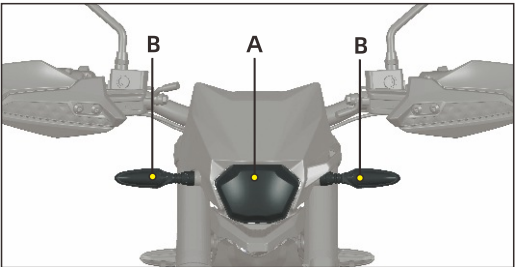

Motorcycle Cleaning

1. Use a sponge or clean soft cloth, neutral detergent and water to gently clean the motorcycle.
2. Be extremely careful when cleaning the dashboard, it is easy to be scratched than other parts of the motorcycle.
3. After cleaning, rinse the motorcycle thoroughly with water to remove all detergent residues.
4. Dry the motorcycle with a soft dry towel.
5. After cleaning, check for damage, wear or any leakage.

After cleaning the motorcycle, please maintain the chain and other parts that need to be lubricated. Please let all electrical components completely dry before operation. If the Ultra Bee electric motorcycle is to be ridden immediately after cleaning, use the brakes several times at a safe and low speed to remove the water or other objects on the brake pads.

Note

Improper cleaning can damage motorcycle parts. Do not use high-pressure washer to flush bearings, seals, electrical components and plugs. In order to extend the service life of the Ultra Bee electric motorcycle, it should be cleaned and maintained regularly and it is recommended to wipe it dry as soon as possible after cleaning. Do not use any harsh chemical products on plastic parts. Avoid using strong corrosive cleaners, solvents or thinners, fuel (gasoline), rust removers or inhibitors, brake fluid, antifreeze in contact with Ultra Bee electric motorcycle to avoid damaging certain parts. We recommend that you carefully use the high-pressure washer to clean the Ultra Bee electric motorcycle to avoid damaging the motorcycle parts. After cleaning and before starting to ride, make sure the brakes system function properly.

Maintenance

Warning

After cleaning and before starting to ride, make sure the brakes system function properly.

Wheel and Tire Cleaning

Avoid using strong acid wheel cleaners. If you use this type of product to clean stubborn dirt, please try to clean it in a short time and dry it immediately.

Warning

Tires only need to be clean. Any tire shine/ strong acidic chemical products may reduce the friction between the tire and the ground, and even reduce the service life of the tires.

Long-term Storage

For motorcycles that have not been used for a long time (more than 30 days), it is recommended to charge to about 60% to 80% of the battery state of charge (SOC), and disconnect the cable between the Ultra Bee electric motorcycle and the battery pack.

The battery pack will also slowly discharge when stored. Check the battery pack charge at least once a month.

When you are ready to use your Ultra Bee electric

motorcycle again, please fully charge the battery pack to ensure that the battery pack is restored to its optimal condition.

In order to extend the service life of the power system, the Ultra Bee electric motorcycle should be stored in a cool and ventilated place. Storing the Ultra Bee electric motorcycle in a hot or humid place will shorten the life span of the battery pack and electrical system. For more information about batteries and electrical systems, please refer to page 8.1.

Caution

Do not store the Ultra Bee electric motorcycle with a battery power lower than 30% of the battery state of charge (SOC). Discharging the battery pack below 30% for a long period of time may reduce the lifespan of the battery pack or even damage the battery pack. Inappropriate store or maintain such as over-discharge or long-term extremely low SOC will damage to the battery pack and also not covered by the warranty.

Warning

Only Surron authorized professionally trained technicians are qualified to provide maintenance services for the battery pack. Please note that unauthorized handling of the internal components of the battery pack is dangerous. Do not disassemble the battery pack!

Ultra Bee Electric Motorcycle Parts

Ultra Bee electric motorcycles parts or accessories are designed to complement and function with other system on the motorcycle, it is requiring the use of specified parts or accessories by the manufacturer. You can obtain original spare parts for maintenance of the Ultra Bee electric motorcycle from your local Surron authorized dealer.

Fuse


The motorcycle electrical system has a multi-channel overloaded protection device. The fuse is a one-time protection device, which will melt and protect when the circuit is overloaded. When replacing the fuse, use the same specification model.

Caution

If the fuse melts repeatedly, please contact the local authorized Surron dealer to check the electrical system.

Low Voltage Fuse Box

The low voltage fuse box is located under the USB cover.

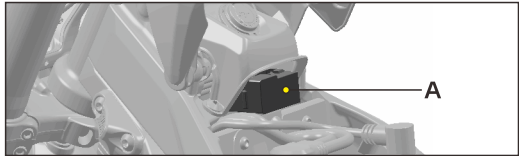


Maintenance

The fuse box has a protective cap, which must be opened first to access the fuse. To open the cap, press down the tab on the side of the box firmly to open the cap.

Replace a Low voltage fuse:


1. Pinch the fuse box and open the fuse box cap to the right of the fuse box.
2. Replace the defective fuse with the same specification model.

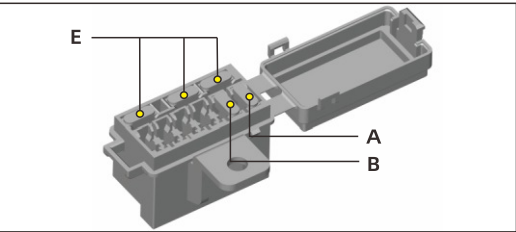

The 12 volt fuse value and corresponding circuit function are listed below:

Fuse	Rating	Function
A	10A	Motocycle main fuse
B	3A	Dashboard
E	3A/10A/20A	Backup

Motorcycle Electrical Circuit Diagram

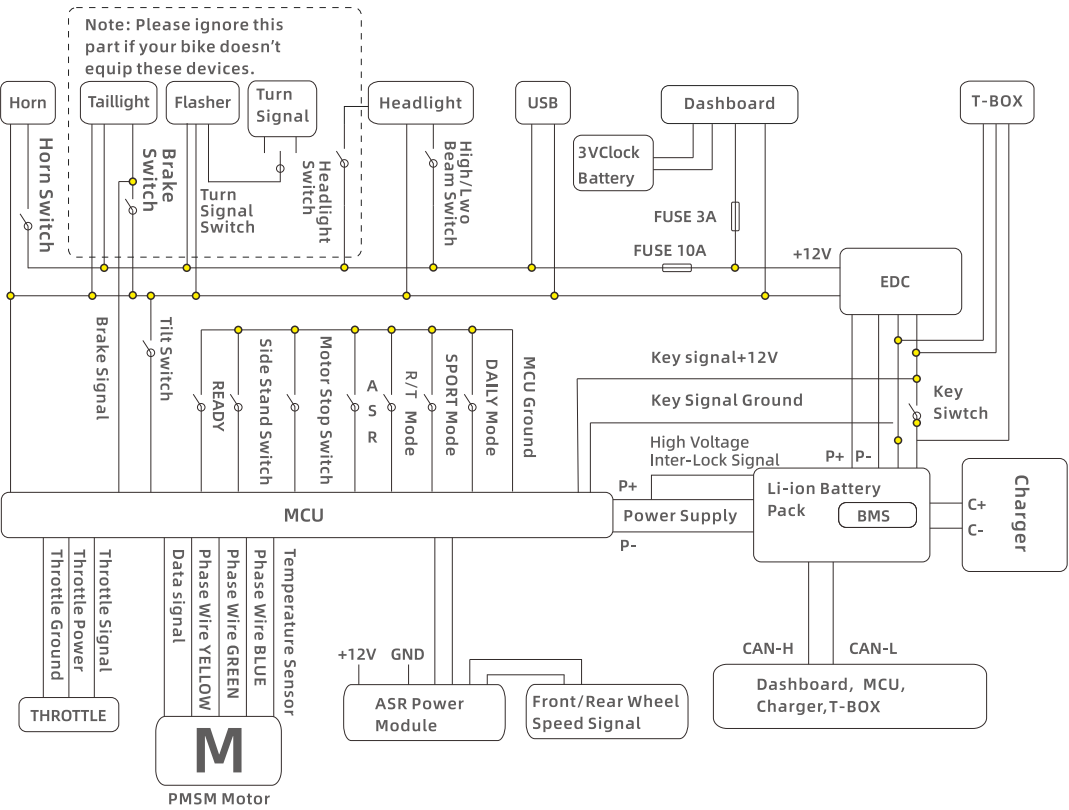

Ultra Bee Electric Motorcycle Troubleshooting

All Ultra Bee electric motorcycles are carefully inspected before delivery. Even the Ultra Bee electric motorcycle is carefully inspected, some technical problems may occur occasionally. The following information provides guidelines to help you identify problems and do the basic repairing or maintenance. If you are unable to solve the problem by yourself, please contact the local authorized Surron dealer. If there is no dealer in your area, please reach out to Surron's after-sales service team.

Safety Interlock

When battery pack is connected to the motorcycle, if the battery management system detects a serious internal failure, one or both of the following two measures will be taken to prevent battery pack damage:


Riding prohibited. If the battery pack state of charge (SOC) is 0, or if the battery management system detects some serious internal faults, the motorcycle will be prohibited from use until the problem is solved.

Charging prohibited. If the battery management system detects some serious internal faults, it will prevent charging, even if the battery pack is connected to the charger and plugged into AC power until the problem is solved.

Precautions for Ultra Bee Electric Motorcycle

Ultra Bee electric motorcycle has high voltage components so please take proper precautions when using it. The high voltage used in these components is dangerous and can result in burns, electric shocks and even serious personal injury.

For safety purposes always follow the instructions on the label attached to the motorcycle parts and do not touch or attempt to remove or replace any high voltage parts, wiring (marked by the orange outer tube) or connectors. In the event of an accident, do not touch any high voltage terminals or components connected to the wires. In case of a fire on the electric motorcycle, make sure your personal safety first and then uses Class D fire extinguisher to put out the fire. When the flame is out, use large quantity of water or a water-based fire extinguisher to cool it down. Do not forget to contact the fire rescue service and inform them that an electric motorcycle with a lithium-ion battery is on fire.

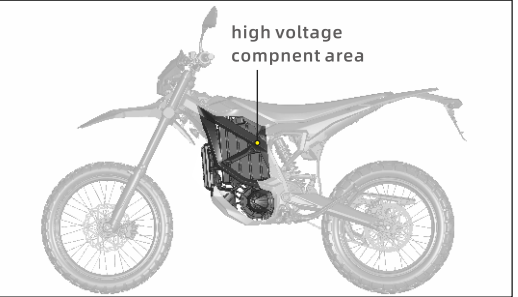

Warning

Ultra Bee electric motorcycle uses 74 Volts high voltage system. At the same time, the power system may be too hot to touch after use. Beware of high voltage and high temperatures and obey all the safety rules and regulations.

Serious Warning

The high voltage circuit system of the electric motorcycle is not allowed to be maintained by the customer. Removing and replacing high-voltage components, cables, or connectors may result in severe burns or electric shocks, or even life-threatening injuries. **High-voltage cables are labeled orange for easy identification.**

System Warning Message

When a fault is detected, the orange fault indicator A on the top of the dashboard will light up, and the corresponding warning code will be displayed in the B area on the Dashboard LCD screen.


Note

1. When motorcycle had issue, the fault indicator will illuminate when in Total mileage mode;

When in TRIP mode, error codes will be displayed in sequence on the LCD screen.

2. If the warning light or fault code stays on, it suggests a possible system malfunction. Safely pull over to a secure location and promptly contact an authorized service center for inspection and repair.

3. During troubleshooting, any losses resulting from the owner's continued use or improper operation will be the sole responsibility of the owner. SURRON's liability is limited to defects arising from the product's design or manufacturing.

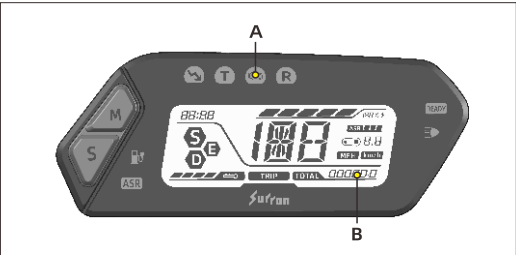

Please refer to the table starting on the next page for possible causes and solutions.

WARNING CODE CHART

WARNING CODE	DESCRIPTION	SOLUTION
ER-000	Dashboard data communication protection	Check dashboard wire connection
ER-003	Over discharge protection (level 2)	Bike enter Low Power Mode, check if motor is in locked rotor condition
ER-004	REGEN overcurrent protection (level 2)	Lower REGEN setting
ER-008	Battery discharge MOS over temperature protection (level 2)	Stop using the bike and contact manufacturer or authorized dealer
ER-010	Battery charge MOS over temperature protection (level 2)	Stop charging and contact manufacturer or authorized dealer
ER-011	Startup self-diagnostic over temperature protection (level 1)	Turn OFF the key switch and back to ON again
ER-013	Battery cell temperature unbalance protection (level 2)	Stop using the bike and contact manufacturer or authorized dealer
ER-015	Battery pack insulation protection (level 2)	
ER-017	Battery cell volume unbalance protection (level 2)	Contact Surrön or authorized dealer
ER-019	Battery cell low voltage protection (level 3)	Charging the battery pack
ER-022	Discharging over current protection (level 3)	Stop using the bike and contact manufacturer or authorized dealer
ER-024	Battery cell discharge over temperature protection (level 3)	Stop using the bike and wait until the temperature back to working condition
ER-025	Battery cell discharge low temperature protection (level 3)	
ER-030	BMS protection board 1 error	
ER-031	BMS protection board 2 error	Contact Surrön or authorized dealer
ER-037	Battery hall sensor error	

Troubleshooting

11.4

WARNING CODE	DESCRIPTION	SOLUTION
ER-038	Battery voltage sensor error	Contact Surron or authorized dealer
ER-040	Battery all temperature sensor error	
ER-041	Startup self-diagnostic temperature sensor error	
ER-043	Battery discharge MOS error	
ER-044	Battery charge MOS error	
ER-100	MCU electron tube error	
ER-101	MCU over current protection (level 1)	Bike enter Low Power Mode
ER-104	Motor position sensor error	Contact Surron or authorized dealer
ER-105	Motor locked rotor error	Check if motor is in locked rotor condition
ER-106	MCU sampling error	Contact Surron or authorized dealer
ER-107	MCU over temperature protection (level 2)	Stop using the bike and wait until the MCU temperature back to working condition
ER-108	Motor over temperature protection (level 2)	Stop using the bike and wait until the Motor temperature back to working condition
ER-109	Main power cable instant Low voltage protection	Check MCU main power cable
ER-110	Main power cable Low voltage protection (level 3)	Charging the battery pack
ER-111	Main power cable high voltage protection	Disable REGEN function
ER-113	Battery cell over/low temperature protection (level 3)	Stop using the bike and wait until the temperature back to working condition
ER-114	Throttle signal protection	Check if throttle cable is short circuited or unable back to idle position

Troubleshooting

11.5

WARNING CODE	DESCRIPTION	SOLUTION
ER-115	Throttle ground protection	Check if e-brake is short circuited
AL-116	Brake override triggered	Check if Brake override system is short circuited
AL-117	Side stand switch/motor stop switch triggered	Check if side stand switch is still down
AL-118	Tilt switch protection	Check tilt switch
ER-119	Main power cable Low power protection	Check bike communication cables, charge the battery pack
ER-127	Motor temperature sensor error	Contact Surron or authorized dealer
AL-128	REGEN disabled	Check battery temperature and battery voltage
ER-129	CAN communication error	Check all wire and cables
ER-130	Speed sensor error	Check if front and rear wheel speed sensor is well connected
ER-131	Main power cable instant High voltage protection	Disable REGEN function
ER-133	Key switch power loose protection	Check key switch and MCU cable connection
ER-134	MCU firmware malfunction protection	Turn OFF the key switch and back to ON again
ER-135	Battery cell high voltage difference protection	Contact manufacturer or authorized dealer
ER-136	High MOS discharging temperature MCU protection	Stop using the bike and wait until the temperature back to working condition
ER-137	Battery cell low voltage protection	Charging the battery pack and contact manufacturer or authorized dealer
ER-138	MCU Regeneration Protection	Turn OFF the key switch and back to ON again
ER-140	Malfunction of inconsistent battery cell temperature	Contact manufacturer or authorized dealer

Troubleshooting

Troubleshooting

WARNING CODE	DESCRIPTION	SOLUTION
ER-141	Malfunction of battery insulation	Contact manufacturer or authorized dealer
ER-143	Gyroscope malfunction	Reset the ignition switch or contact the manufacturer or dealer.
ER-144	BMS discharging over current power limitation	low power mode (level 1)
ER-145	Battery cell high voltage difference power limitation	low power mode (level 2)
ER-146	High MOS discharging temperature power limitation	Stop using the bike and wait until the temperature back to working condition
AL-147	Battery cell low voltage power limitation	Charging the battery pack and contact manufacturer or authorized dealer
AL-149	The motorcycle status does not meet the requirements for SWC system.	Stop switch reset/Restart ignition switch
AL-151	Disable negative torque when speed is below 3 km/h.	Automatically resumes when exceeding 3 km/h

11.6

11.7

Troubleshooting

Troubleshooting

Faults	Possible cause	Action
Bike does not power on	Battery not plug into correct position	Check battery plug
	Battery SOC too low	Charging the battery
	Battery enters temperature protection	Wait until temperature back to working condition
	Main harness fuse melted	Check all wire and cables and replace fuse
	Key switch not properly engaged	Recheck key switch or replace new key switch
	DC converter error	Replace DC converter
	Battery malfunction	Contact Surron or authorized dealer
Bike powered on but not moving	Side stand switch protection	Lift Side stand up
	Brake override protection	Check Brake override system
	Tilt sensor was triggered but not reset	Switch off the key switch and turn on again after lift up the motorcycle
	Throttle not in idle position when motorcycle powered on	Check throttle position
	Battery low SOC protection	Charging the battery
	Motor temperature protection	Wait until the temperature back to working condition
	MCU temperature protection	
	Side stand switch error	Disconnect or replace side stand switch
	Brake override system error	Disconnect or replace Brake override switch
	Tilt sensor error	Disconnect or replace tilt sensor

Troubleshooting

Faults	Possible cause	Action
Bike powered on but battery SOC not display	Throttle error	Replace throttle
	MCU not plug in position	Check MCU plug connection
	Motor encoder not plug in position	Check motor encoder plug connection
	MCU or motor encoder error	Contact authorized dealer repair or replace MCU
		Contact authorized dealer repair or replace motor
Bike powered on but battery SOC not display	Coulombmeter not connect properly	Contact manufacturer or authorized dealer to repair or replace battery
	Coulombmeter error	
Charger not working	Battery enters temperature protection	Wait until the temperature back to working condition
	charger not plug properly	Check power source and plug again
	Charger malfunction	Replace charger
	Battery malfunction	Contact manufacturer or authorized dealer
Temperature back to working condition	Low battery SOC	Charge battery
	Battery temperature protection	Wait until the temperature back to working condition
	MCU or motor temperature protection	
	Riding mode switch error	Replace riding mode switch
USB prot no power	USB not plug properly	Check USB connection and plug again
	USB converter error	Replace USB converter

Note: We will keep updating all the information above, please check latest version on our website.

Warranty Information

Condition of Warranty

Surron hereby warrants new Surron bike purchased from an Surron authorized dealer to be free from defect in materials and workmanship for the period of time stated herein, subject to certain limitations stated herein. This warranty applies only if the bike has been properly set-up and serviced for pre-delivery by an authorized Surron dealer. The warranty applies only if the motorcycle has been operated and maintained in accordance with the owner’s manual or other Surron literature delivered with the bike. This warranty is void if the ONLINE OWNER’S REGISTRATION/ DEALER PRE-DELIVERY INSPECTION has not been completed in full and entered into Surron Distributor website within 7 days of purchase by the original selling dealer.

Period of Warranty for Surron Motorcycle

Street legal motorcycles ride on road and non-demonstrator motorcycles.

Duration: 24 months from date of purchase or 20,000 kilometers, whichever comes first.

Limitations: The warranty can be transferred to subsequent owners within the stated warranty period.
Applies to: Ultra Bee R-25 (Road), Ultra Bee T-25 (Trail)

Off-road used motorcycles but not used in competition:

Duration: 12 months from date of purchase or 10,000 kilometers, whichever comes first.

Limitations: This warranty is not transferable and applies to the original purchaser only.

Applies to: Ultra Bee T-25(Trail), Ultra Bee T NA-25 (Offroad)
Competition motorcycles or any other Surron models used in competition:

Duration: 30 days from date of purchase.

Limitations: This warranty is not transferable and applies to the original purchaser only .

Applies to: Ultra Bee T NA-25 (Offroad)

Any Surron motorcycle utilized commercially in connection with generating income and/or is commercially licensed or tagged (e.g., Rental, demonstrate, wholesale etc.) during the warranty period will be covered for 30 days from the date of purchase.

Demonstrate motorcycle are Surron electric motorcycle that have been ridden by or used by Surron or a Surron authorized dealership’s customers, members of the staff or press media, but have never been registered within the state, province or country.

The warranty period is effective on the date of purchase by the Original Purchaser and remains in effect only as stated above.

PARTS COVERED BY THE WARRANTY

Surron warrants to the customer that the motorcycle is defect-free both in terms of material and workmanship from the factory. Due to the battery chemistry, there is a normal, expected reduction in range/capacity that battery packs can yield over time and usage. Depending on use and storage conditions, battery packs will degrade during the duration of this warranty time. Surron will only repair or replace pursuant to this warranty term a battery pack that exhibits a nominal storage capacity reduction of greater than 20% of the published nominal capacity, as measured by Surron or a Surron authorized dealer/workshop.

Any part found to be defective during the motorcycles stated warranty period under proper use and normal operating conditions subject to the limitations of this warranty policy will be repaired or replaced free of charge. “Normal operating conditions” require routine care and maintenance of the Surron electric motorcycle and battery pack as described in the Owner’s Manual.

WARRANTY LABOR COVERAGE

Labor to replace parts that are covered in the Surron warranty, which are found to be defective in material or workmanship, is no charge to the original purchaser. Warranty repairs must be done only with the authorization of Surron. The cost of parts and labor involved in any routine care and maintenance and/or the replacement of parts due to normal wear and tear, use, or deterioration, including but not limited to: tires, brake

Warranty Information

pads and rotors, drive belt, drive chain, fork seals, bearing, grips, foot pegs, and the seat etc.

GENERAL EXCLUSIONS FROM WARRANTY

This warranty does not cover any failures resulting from, or caused by:

1. Lack of proper maintenance or contrary to the requirements described in the Owner’s Manual.
2. Modification, alterations, and installation of parts that are not genuine Surron parts or supplied as original equipment.
3. Parts, components or battery pack damaged by use or operation under abnormal circumstances, damages due to accident, collision, abuse, neglect or exceeded use like competition level.
4. Modification, alterations, and installation of not genuine Surron or Surron authorized Power System like motor, gearbox, battery and MCU.
5. Normal wear components, including but not limited to, the following: tires, rim, brake components, spokes, drive chain, drive belt, handle grips, all bearings, all seals, all transmission gear, suspension valving/seals, all sprockets, foot pegs and seat.
6. Damage, malfunctions, or performance problems caused by continued operation of the motorcycle after an error code shown or other warning indicates a mechanical or operational problem.
7. Any cosmetic concerns that arise as a result of

Warranty Information

environmental conditions, owner abuse, misuse, such as, but not limited to, using not suitable liquid etc., lack of routine care and maintenance, and/or improper use.

8. Damages or malfunctioned to the component and electric system due to owner installing non genuine Surron parts or replacement parts not approved by Surron.

9. Damages to the paint, coatings or corrosion of metal parts due to external influences such as stones, salt. Fading or painted or metal coated surfaces.

10. Damage, malfunctions, or performance problems caused by fire, collision, accident, or improper storage.

11. The tires installed on the Surron electric motorcycle. The original equipment tires are warranted separately by the tire manufacturer.

In addition, Surron warranty are only for end-user customers, not applicable to bike or accessories not imported or distributed by Surron or authorized by Surron.

Owner Responsibility

1. Owner is responsible for to read and understand the Owner’s manual, this warranty term, and all product warnings before operating your Surron electric motorcycle. Maintaining the Surron electric motorcycle in accordance with the schedule printed in the Owner’s manual.

2. Owner is responsible for the costs of maintenance to the motorcycle including service at scheduled intervals.

Service work done by the owner will void the warranty. Perform all recommended and necessary routine care and maintenance and engage in proper use of your Surron electric motorcycle as detailed in the Owner’s manual, failures caused directly by lack of maintenance or improper maintenance will void the warranty.

3. If warranty repairs are needed, they must be performed by an authorized Surron dealership with correct qualifications. The owner may be asked to provide the following documentation of proper maintenance: a maintenance record which displays the date of service and service work performed by an authorized dealer, copies of repair orders/ receipts.

4. The original registered owner as documented on the Surron motorcycle warranty registration form is responsible for conveying the Owner’s Manual and all safety warnings, instructions, and Limited Warranty if the unit is sold, loaned, or otherwise transferred to another person.

5. If the vehicle owner needs to replace a faulty part, please contact the authorized dealer of Surron or send the faulty part to the authorized dealer of Surron within ten (10) days after the malfunction occurs, and the authorized dealer will provide warranty or after-sales maintenance for the faulty part.

6. Owner is responsible for performing all recommended and necessary routine care and maintenance and engage in proper use of your Surron motorcycle and battery pack as detailed in the Owner’s Manual including obtaining any firmware updates available at

Warranty Information

limited warranty does not cover any incidental or consequential damages, including loss of value of the motorcycle, lost profits or earnings, out-of-pocket expenses for substitute transportation etc., expenses associated with returning the covered product back to its owner, mechanic's travel time or communication charges, loss or damage to personal property, loss or time, or inconvenience. Surron has the right to continuously upgrade the design and electric system or improve not limited to the motorcycle, power system or battery pack. Some countries do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. also excluded from this warranty are any incidental or consequential damages including loss of use. Some countries do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary, from country to country. The contents stated herein are subject to change without notice.

DISCLAIMER

SURRON is not responsible for any losses arising from owners' intentional misuse, gross negligence, unauthorized modifications—such as abnormal system logs, mismatched hardware identification codes, or abnormal performance parameters—use of uncertified accessories, or operations exceeding design specifications. In cases of damage caused by manufacturing or design defects, SURRON will offer

each service interval or in a timely basis following a notification that a new update is available of which must be completed by an authorized Surron dealer. Learn and obey all federal, state, and local laws governing the operations of a motorcycle, generally, and an electric motorcycle, specifically. When operating a Surron electric motorcycle, must wear proper safety equipment and clothing, including but not limited to helmet, eye protection, and appropriate boots at all times. Convey the Owner’s Manual and all safety warnings, instructions, and Limited Warranty if the unit is sold, loaned, or otherwise transferred to another person.

7. Surron does not authorize any company or person to create a liability or any warranty obligation on its own behalf. Surron in its sole discretion will make the final disposition of any component(s) submitted for warranty evaluation. All parts and components returned to Surron, and replaced under this warranty shall become the property of Surron.

Limitations on Warranty

The limited warranty described in the Warranty information pages is the only warranty which applies to your motorcycle. Surron makes no other warranty or guarantee of any kind expressed or implied. No implied warranties of merchantability or fitness for a particular purpose or any purpose, is applicable to any product sold by Surron buyer and all other parties who contract with Surron, hereby specifically and knowledgeably waive any and all warranties, expressed or implied. This

Warranty Information

appropriate remedies, including repair, replacement, or refund, depending on the situation. For claims related to personal injury, property damage, or emotional distress, SURRON shall be exempt from liability to the maximum extent allowed by law.

For products distributed via specialized sales channels, such as equipment designed for competitive use, SURRON's liability is confined exclusively to manufacturing defects. The owner acknowledges and accepts that participation in competitions, use in racing environments, professional modifications, or any other conditions surpassing typical consumer use, as well as their resulting outcomes, are entirely the owner's responsibility.

Unauthorized reverse engineering, decompilation, or alteration of the electrical control system without prior written approval from SURRON is considered a contract violation. In cases of minor infractions, such as non-commercial individual modifications, SURRON retains the authority to demand an immediate halt to the activity and issue a formal warning. For major infractions, such as commercial-scale reproduction or sales, the company may seek legal injunctions and demand damages. These damages will be calculated as either the official retail price of the affected product model per instance of violation or the actual financial loss suffered by SURRON—whichever amount is greater. The official retail price at the time of the infraction will serve as the

basis for this calculation. Furthermore, SURRON reserves the right to confirm modification activities on owner's devices through remote diagnostics or direct inspections, requiring full collaboration from the owner.

By using this product, the owner consents to the installation of a GPS tracking system for verifying its location and grants SURRON permission to periodically check its usage region. In cases of unauthorized use, the owner will be required to pay a penalty amounting to three times the product's retail price. Additionally, SURRON reserves the right to remotely disable the product's functionality immediately. The company holds no responsibility for any usage in jurisdictions where additional legal obligations or liabilities may arise.

How to Obtain Warranty Service

To receive any type of warranty service, take your Surron motorcycle and warranty registration proof to any authorized Surron dealer during normal service hours. If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform Surron or your Surron authorized dealer. If you fail or does not meet the conditions and scope of the warranty terms, we can still provide repair services upon your request with certain charge. If you are unable to get satisfactory warranty service at a Surron dealer, or you are dissatisfied with a warranty decision, please write e-mail to the following address:

service@qiulongtech.com

We will need the following information in order to assist you:

- Your name, address, and phone number
- Product model and vehicle identification number (VIN number)
- Date of purchase-Dealer name and address-Nature of problem

Warranty Information

Note

We will complete the warranty work as soon as possible, but not responsible for delays in work caused by factors beyond our control. The aforementioned factors include but are not limited to: shortage of spare parts, delay in transportation, force majeure, etc.

Reporting Safety Defects

United States

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration (NHTSA) in addition to notifying Surron. If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or Surron. To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at:

1-888-327-4236 (TTY: 1-800-424-9153); go to

<http://www.safercar.gov>

or write to:

Administrator

Warranty Information

National Highway Traffic Safety

1200 New Jersey Avenue SE

Washington, DC 20590

You can also obtain other information about motor vehicle safety from:

<http://www.safercar.gov>

Canada

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform Transport Canada, in addition to notifying Surron.

To contact Transport Canada, call their toll-free number:

+1-800-333-0510


United Kingdom, Europe, and Global Markets

If you believe that your vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform your Surron authorized dealer. If you are unable to resolve the issue with your Surron authorized dealer you can contact Surron directly on +86-23-6890-5603, or through our website at:

<http://www.sur-ron.com>

12.7

Warranty Information

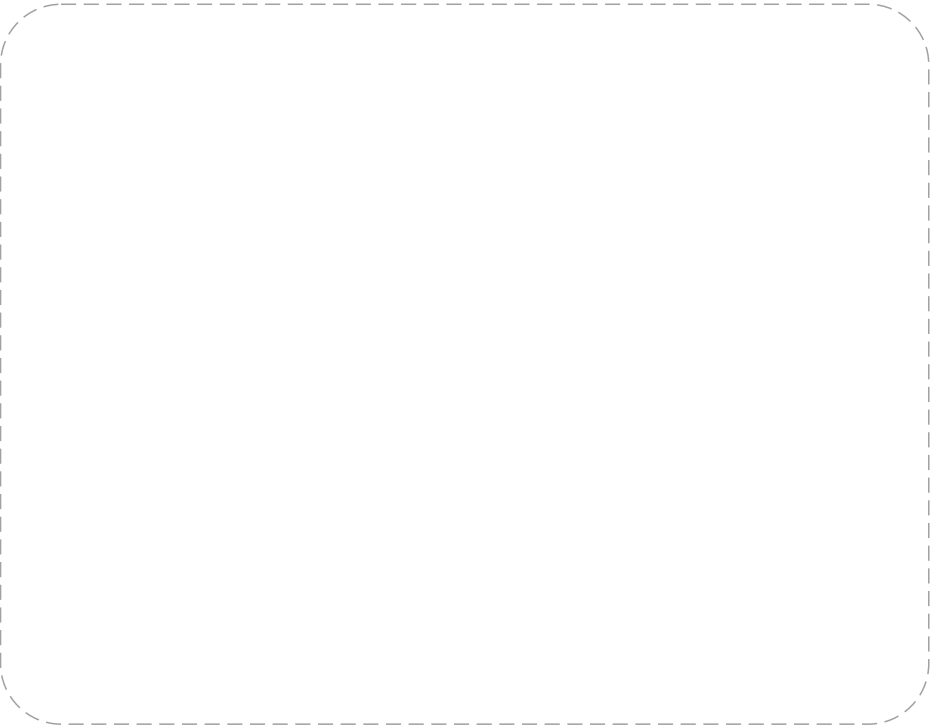

12.8

After you have had your motorcycle serviced, please make sure that the appropriate maintenance record has been completed. Use the space “Remark” to record issues you want to remind yourself about or mention at the next service.

100km

Odometer reading		Performed by		Date	
Maintenance Record Sheet					
Remark					

13.1

500km

Odometer reading		Performed by		Date	
Maintenance Record Sheet					
Remark					

13.2

1000km

Odometer reading		Performed by		Date	
Maintenance Record Sheet					
Remark					

13.3

2000km

Odometer reading		Performed by		Date	
Maintenance Record Sheet					
Remark					

13.4

5000km

Odometer reading		Performed by		Date	
Maintenance Record Sheet					
Remark					

13.5

10000km|12months

Odometer reading		Performed by		Date	
Maintenance Record Sheet					
Remark					

13.6

After-sales Services Record Sheet					
	Odometer reading	Warranty item	Performed by	Date	Remark
1					
2					
3					
4					
5					

After-sales services record sheet					
	Odometer reading	Warranty item	Performed by	Date	Remark
6					
7					
8					
9					
10					

TECHNICAL DETAILS	SPEC	ULTRA BEE T NA-25 (Offroad)	ULTRA BEE T-25 (Trail)
	VEHICLE MODEL	QL6000DY-A	QL6000DY-B
	Dimension	2010mm×850mm×1180mm	2080mm×850mm×1180mm
	Ground clearance	315mm	315mm
	Seat height	910mm	910mm
	Dry/Curb weight	88.5kg	91kg
	Carrying capacity	100kg	100kg
	Front tire	80 / 100-19 offroad tire	80 / 100-19 offroad tire
	Rear tire	100/90-18 offroad tire	100/90-18 offroad tire
	Assistance functions	ASR + BERS	ASR + BERS
	Wheel base	1380mm	
	Front fork travel	240mm	
	ear shock/wheel travel	85/240mm	
	Power system	Mid-drive PMSM motor + FOC sine wave MCU	
	Rated power	6kW	
	Peak power	21kW	
	Maximum torque	511N.m	
	Top speed	95km/h	
	Range	115km(@50km/h)	
	Battery Type	74V/60Ah lithium-ion removable battery pack	
	Charge time	4.5h	
	Frame design	Aluminum forged frame	
	Riding mode	Eco / Daily / Sport / Crawl mode + Reverse Mode	

TECHNICAL DETAILS	SPEC	ULTRA BEE R -25 (Road)
	VEHICLE MODEL	QL6000DY-B
	Dimension	2060mm×850mm×1180mm
	Ground clearance	315mm
	Seat height	910mm
	Dry/Curb weight	94kg
	Carrying capacity	100kg
	Front tire	90 / 90-19 all terrain tire
	Rear tire	120 /80-18 all terrain tire
	Assistance functions	ASR + BERS
	Wheel base	1380mm
	Front fork travel	240mm
	Rear shock/wheel travel	85/240mm
	Power system	Mid-drive PMSM motor + FOC sine wave MCU
	Rated power	6kW
	Maximum power	21kW
	Maximum torque	511N.m
	Top speed	95km/h
	Range	115km(@50km/h)
	Battery Type	74V/60Ah lithium-ion removable battery pack
	Charge time	4.5h
	Frame design	Aluminum forged frame
	Riding mode	Eco / Daily / Sport / Crawl mode + Reverse Mode

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1. Reorient or relocate the receiving antenna.
- 2. Increase the separation between the equipment and receiver.
- 3. Connect the equipment into an outlet on a

- circuit different from that to which the receiver is connected.
- 4. Consult the dealer or an experienced radio/TV technician for help.


You and the Environment

Owning and riding a motorcycle can be enjoyable, but you must do your part to protect nature. When you show respect for the land, wildlife, and other people, you also help preserve the sport of off-road riding.

Following are tips on how you can be an environmentally responsible motorcycle owner.

- 1. Choose sensible cleaners. Use a biodegradable detergent when you wash your Ultra Bee. Avoid aerosol spray cleaners that contain chlorofluorocarbons which damage the atmosphere's protective ozone layer. Don't throw cleaning solvents away; see the following guidelines for proper disposal.
- 2. Recycle Wastes. It's illegal and thoughtless to put used engine oil in the trash, down a drain, or on the ground. Use coolant, and cleaning solvents contain poisons that can hurt refuse workers and contaminate our drinking water lakes, rivers, and oceans.
- 3. Put toxic wastes in separate sealed containers and

take them to a recycling center. Call your local or state office of public works or environmental services to find a recycling center in your area and get instructions on how to dispose of non-recyclable wastes. Improper disposal of drained fluids is harmful to the environment.

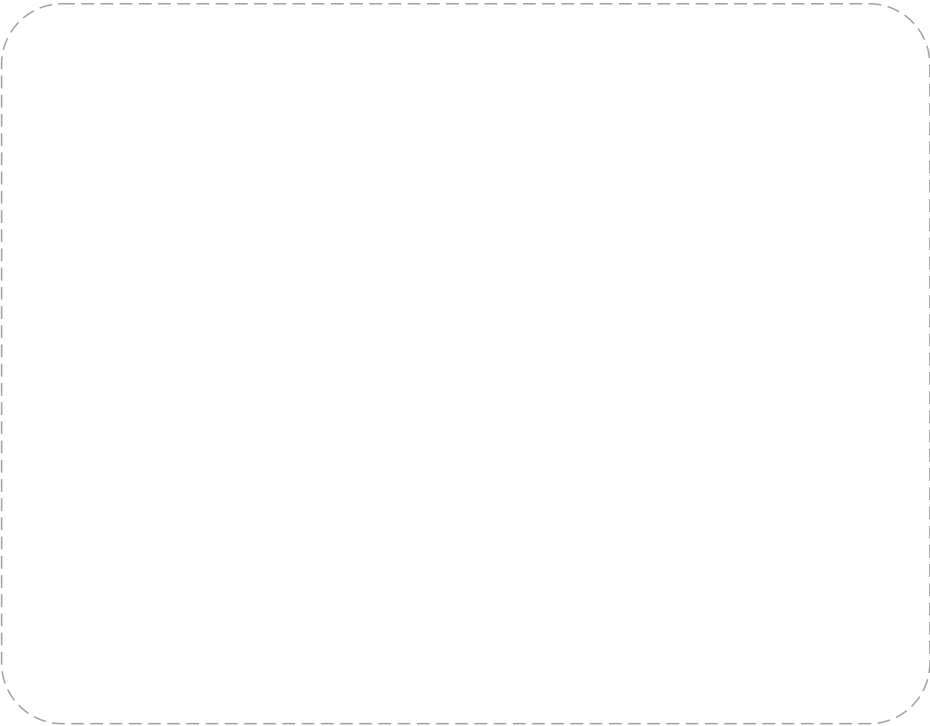

-FETCH LIGHT-飞起来-